

Schottky Diodes

Features

- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260



Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

Package: TO-263

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant

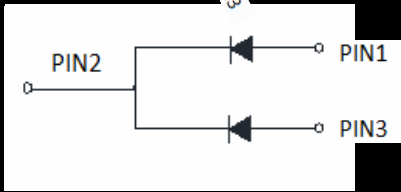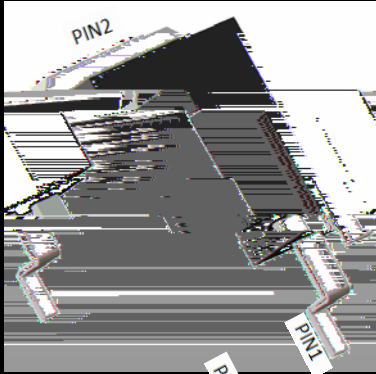

	MBRBU40100CT
	MBRBU40100CT
V	100
A	40
A	320
A ² s	425
-	-55 ~ +150
-	-55 ~ +150

Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MBRBU40100CT
			I _F = 20.0A	0.71
			V _F = V _R RM	0.2



MBRBU40100CT-F2-W5094HF


Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	MBRBU40100CT
-----------	--------	------	--------------




MBRBU40100CT-F2-W5094HF

Outline Dimensions

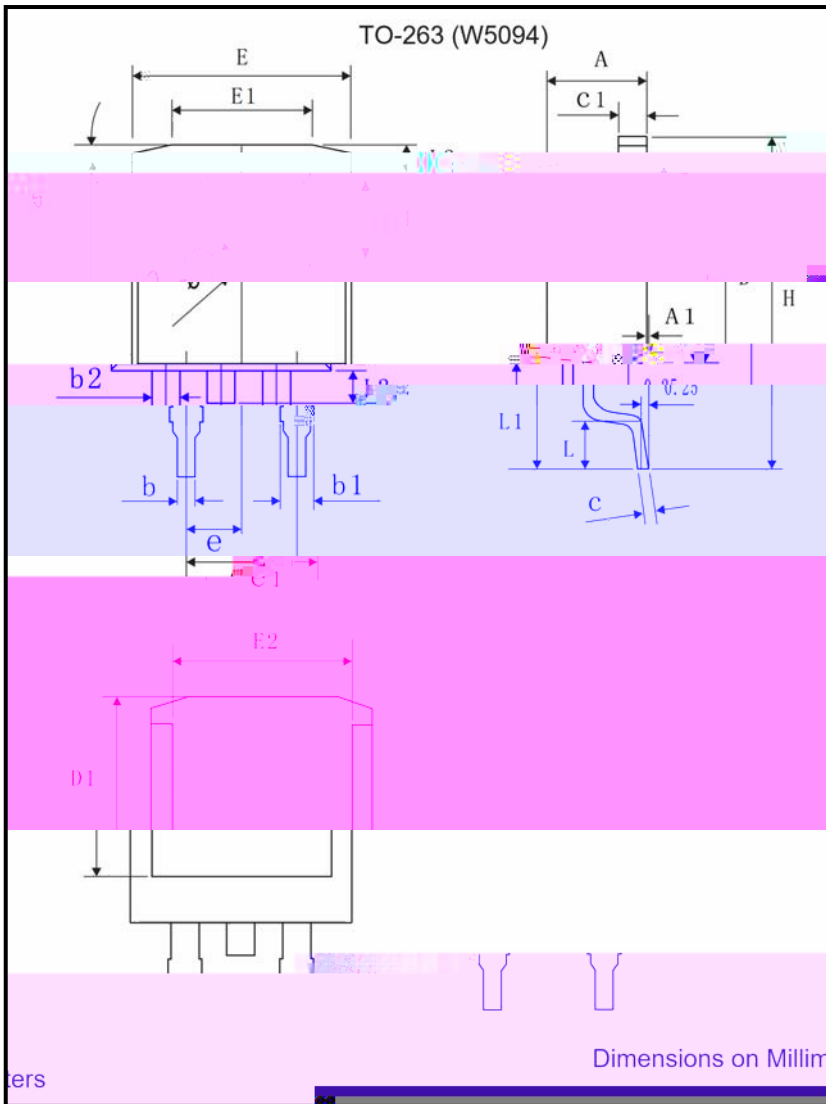

TO-263		
Dim	Min	Max
A	4.30	4.70
A1	0.00	0.25
b	0.70	0.90
B1	1.17	1.37
B2	1.17	1.37
C	0.40	0.60
C1	1.25	1.35
D	9.00	9.20
D1	8.00	8.20
H	14.9	15.5
E	9.80	10.2
E1	6.30	6.50
E2	7.90	8.10
e1	4.93	5.23
L	1.85	2.45
L1	4.45	4.85
L2	1.30	1.70
L3	1.15	1.35
L4	4.50	4.60
∅	1.5 REF	
e	2.54 BSC	
∠	13°TYP	

Suggested Pad Layout

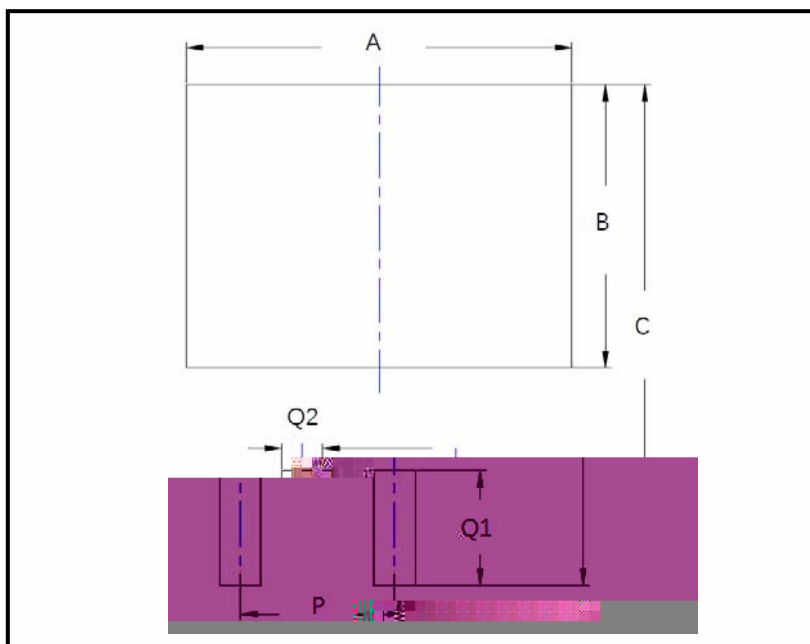

Dim	Millimeters
A	12.7
B	9.4
C	16.6
P	5.08
Q1	3.8
Q2	1.35



MBRBU40100CT-F2-W5094HF

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.