




- Stand-off voltage: $\pm 5.5\text{V}$ Max
- Transient protection for each line according to
 - IEC61000-4-2(ESD): $\pm 30\text{kV}$ (contact)
 - IEC61000-4-4 (EFT): 40A (5/50ns)
 - IEC61000-4-5(surge): 10A (8/20 μs)
- Low leakage current
- Ultra-low capacitance: $C_j = 25\text{pF}$ typ.
- Low clamping voltage:
 $V_{CL} = 8.6\text{V}$ typ. @ $I_{PP} = 16\text{A}$ (TLP)
- RoHS Compliant
- Solid-state silicon technology

- Cellular handsets
- Tablets
- Laptops
- Other portable devices
- Network communication devices

- Package: DFN0603-2L
- Case Material: "Green" Molding Compound
- Moisture Sensitivity: Level 3 per J-STD-020
- Marking Information: See Below

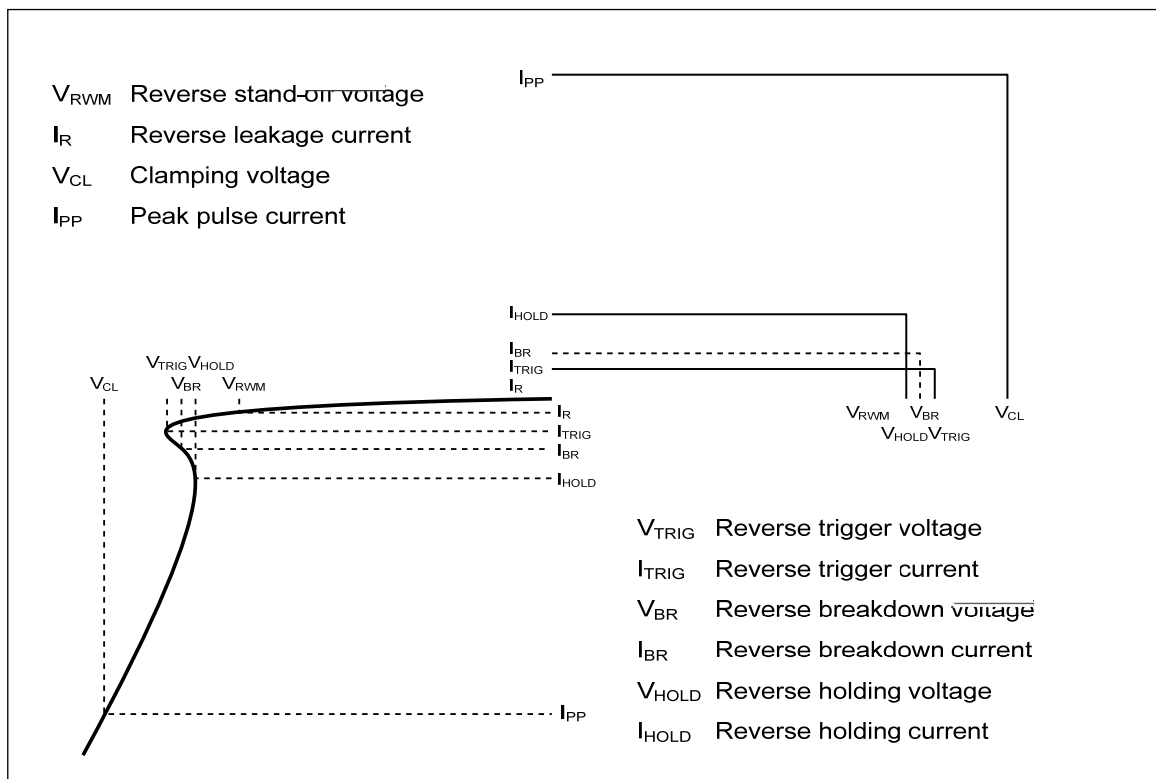






Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	140	W
Peak pulse current ($t_p = 8/20\mu s$)	I_{PP}	10	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	kV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	-45~125	$^{\circ}C$
Storage temperature	T_{STG}	-55~150	$^{\circ}C$



Reverse maximum working voltage	V_{RWM}	V				± 5.5
Reverse leakage current	I_R	μA	$V_{RWM} = 5.5V$			0.1
Reverse breakdown voltage	V_{BR}	V	$I_{BR} = 1mA$	6.8	7.3	
Clamping voltage ¹⁾	V_{CL}	V	$I_{PP} = 16A, t_p = 100ns(TLP)$		8.6	
Dynamic resistance ¹⁾	R_{DYN}	Ω			0.17	



■

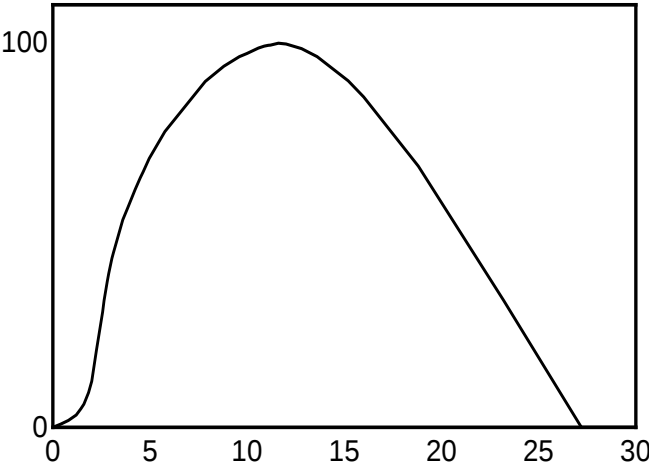

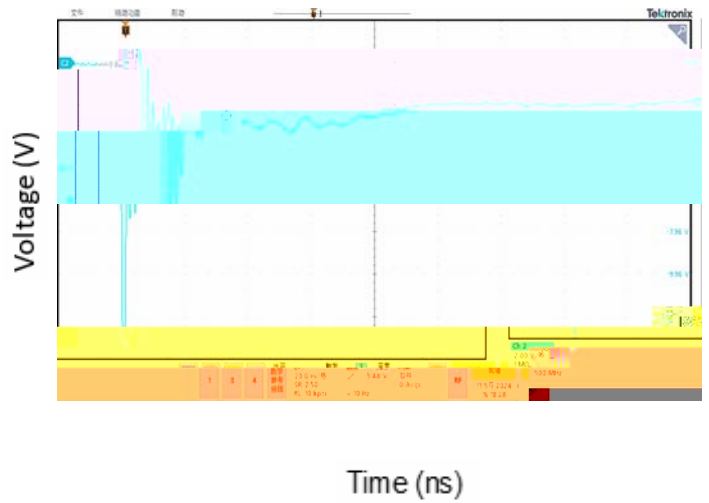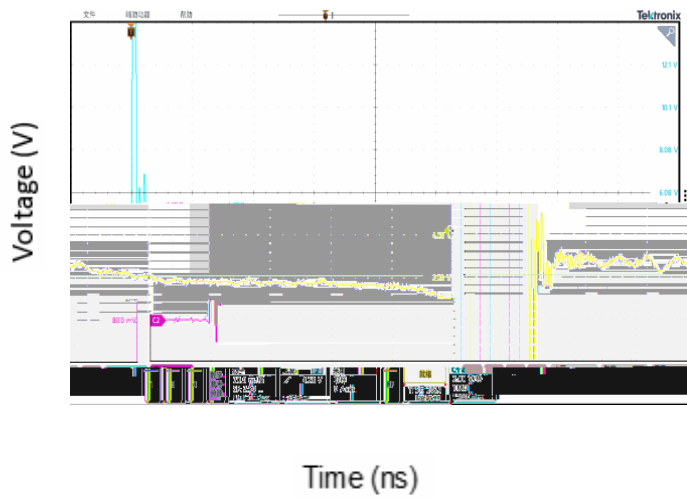

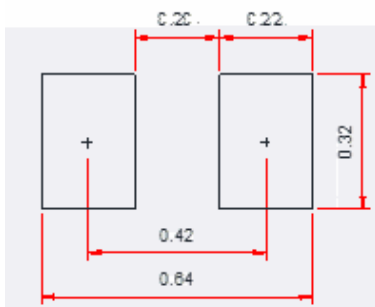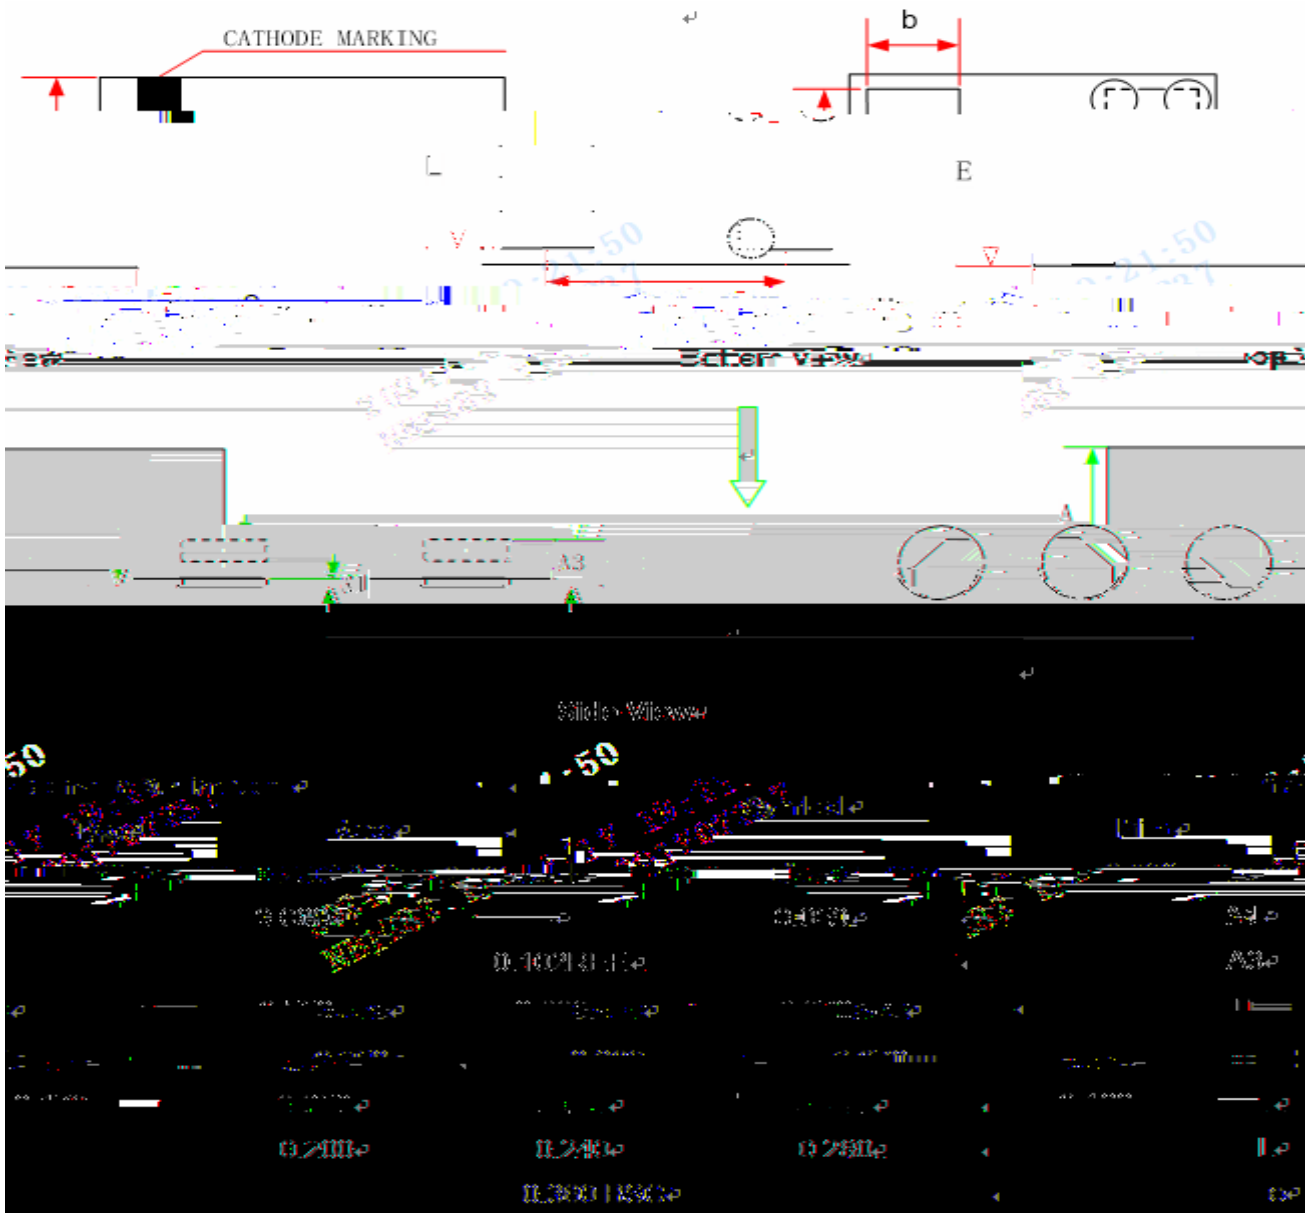

' À i n z ktλ NÆ M N



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes to the specification of the products displayed here / to improve reliability, function, design or otherwise.

The product listed here is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require a high level of reliability. Malfunction of a product could directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and safety-critical devices). Yangjie or anyone who uses it assumes liability for any damages resulting from such improper use of sale.

This publication does not replace all information applied. For additional information, please visit our website <http://www.21yangjie.com>, or consult our nearest Yangjie's sales office for assistance.