


Small-Signal Fast Switching Diodes

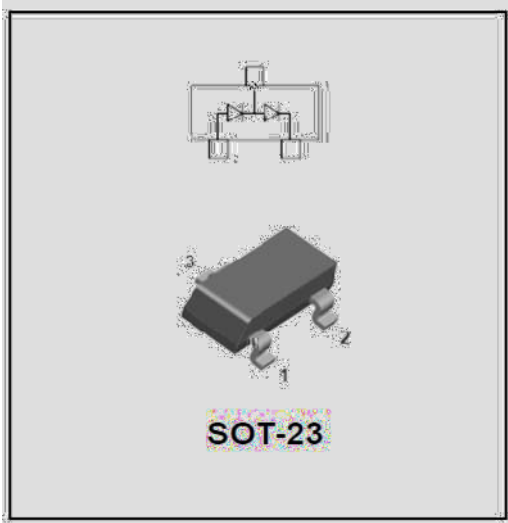

Features

- V_R 100V
- I_{FAV} single diode loaded 215mA
double diode loaded 125mA

Typical Applications

- Low-Leakage

Mechanical Data

- Package: SOT23
- Terminals: Tin plated leads , solderable per J-STD-002 and JEDEC22-B102
- Marking: JY

■Maximum Ratings ($T_a=25^\circ\text{C}$)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Repetitive peak reverse voltage	V_{RRM}	V		100
Reverse voltage	V_R	V	$I_R=100\mu\text{A}$	100
Peak forward surge current	I_{FSM}	A	Non-Repetitive $t=1\mu\text{s}$	4
Average forward current	I_{FAV}	mA	single diode loaded	215
			double diode loaded	125
Power dissipation	P_{tot}	mW		250
Maximum junction temperature	T_j			
6WRUDJH WHP SHUDWXUH	UDQJH		7	WR

■Electrical Characteristics

PARAMETER	Symbol	UNIT	Conditions	Min	Max
Breakdown Voltage	V_R	V	$I_R=100\mu\text{A}$	100	
Forward Voltage	V_F	V	$I_F=1\text{mA}$		0.9
			$I_F=10\text{mA}$		1.0
			$I_F=50\text{mA}$		1.1
			$I_F=150\text{mA}$		1.25
Reverse Leakage Current	I_R	nA	$V_R=75\text{V}$		5
Capacitance	C	pF	$V_R=0\text{V}$, $f=1\text{MHz}$		4
Reverse Recovery Time	T_{rr}	us	$I_F=I_R=10\text{mA}$, U_U , 5/5/		



BAV199

Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAV199	F2	Approximate 0 . 0 0 8	3 0 0 0	3 0	0 0 0	12 0 0 0 0

v627 3DFNDJH 2XWOLQH 'LPHQVLRQV

v627 6XJJHVWHG 3DG /D\RXW



Disclaimer

The information presented in this document is for reference only. Yang z hou Yangjie Electronic Technology Co. , Ltd . eeser v es right to make changes without notice for the specification of the products displayed herein to improve reliability , function or otherwise .

The product listed herein is designed to be used with ordinary electronic equipment or devices , and not designed to be used with equipment or devices which require high level of reliability and malfunction of which would directly endanger human life (such as medical instruments , transport equipment , aerospace machinery , nuclear-reactor controllers , fuel controllers and other safety devices) , Yangjie or anyone on its behalf , assumes no responsibility for any damages resulting from such improper use of sale .

This publication supersedes & replaces all information previously supplied . For additional information , please visit our website <http://www.21yangjie.com> or consult your nearest Yangjie's sales office for assistance .