

Battery Contacts  
Power management  
Power supply protection


### Mechanical Characteristics

Package: DFN1610-2L  
Case Material: "Green" Molding Compound.  
Moisture Sensitivity: Level 3 per J-STD-020  
Marking Information: See Below



Device	Device code
ESD7V0P6A	7DA
ESD10VP6A	aDA
ESD12VP6A	cDA
ESD15VP6A	fDA

### Definitions of electrical characteristics

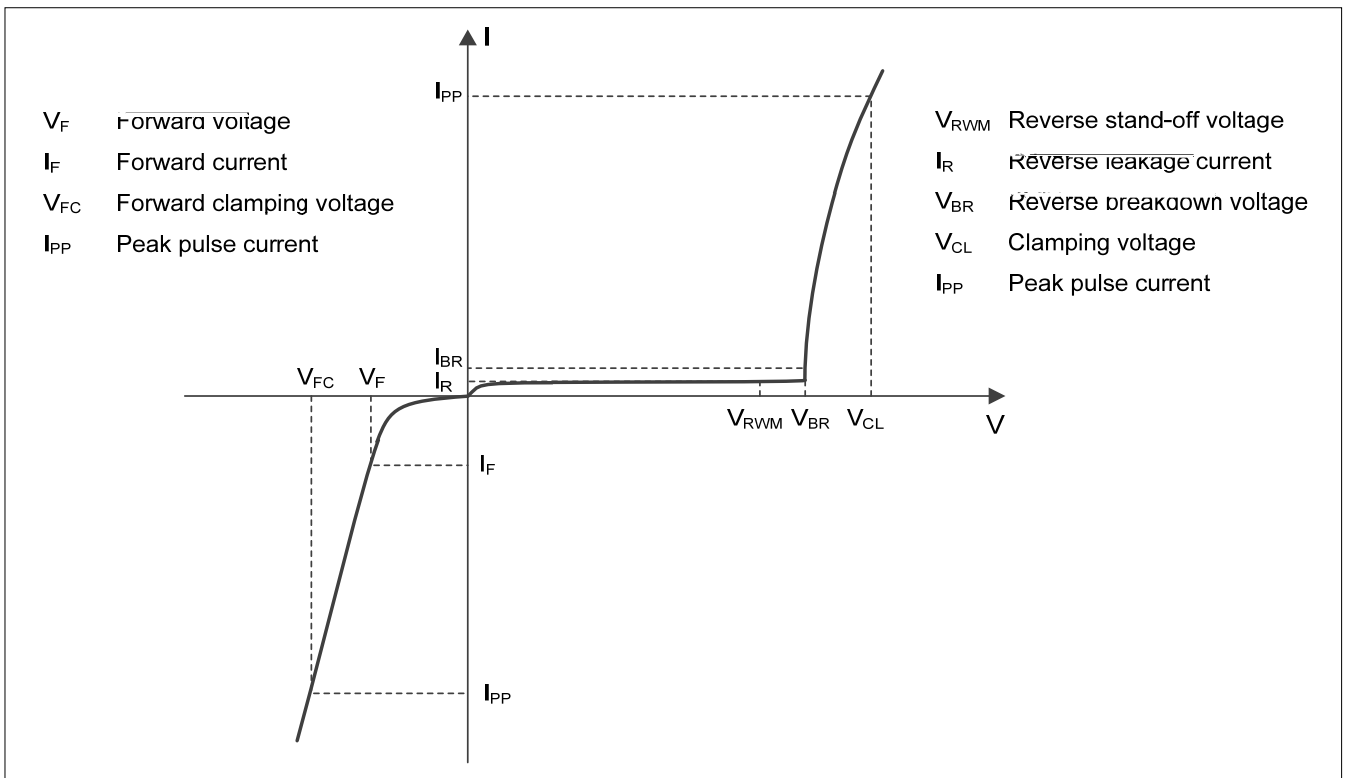



## ESD7V0P6A THRU ESD15VP6A

---

**Absolute Maximum Ratings** (Ta=25°C unless otherwise specified)

[Redacted content]


# ESD7V0P6A THRU ESD15VP6A

---




# ESD7V0P6A THRU ESD15VP6A

## Outline Dimensions

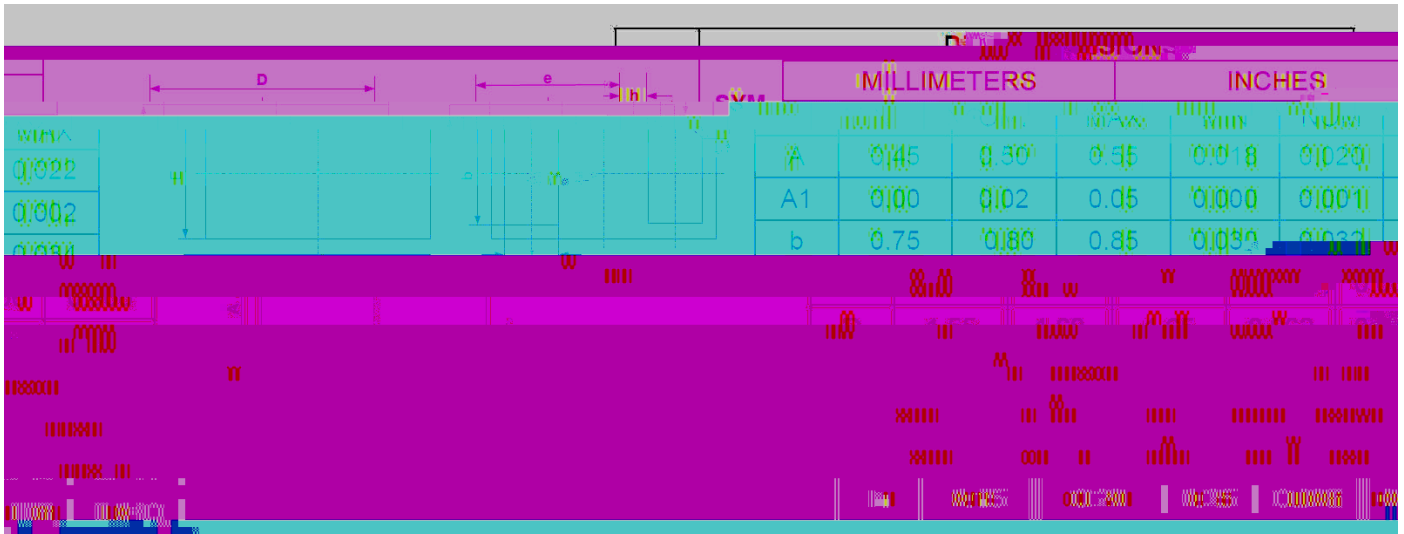

## Recommend land pattern (Unit:mm)

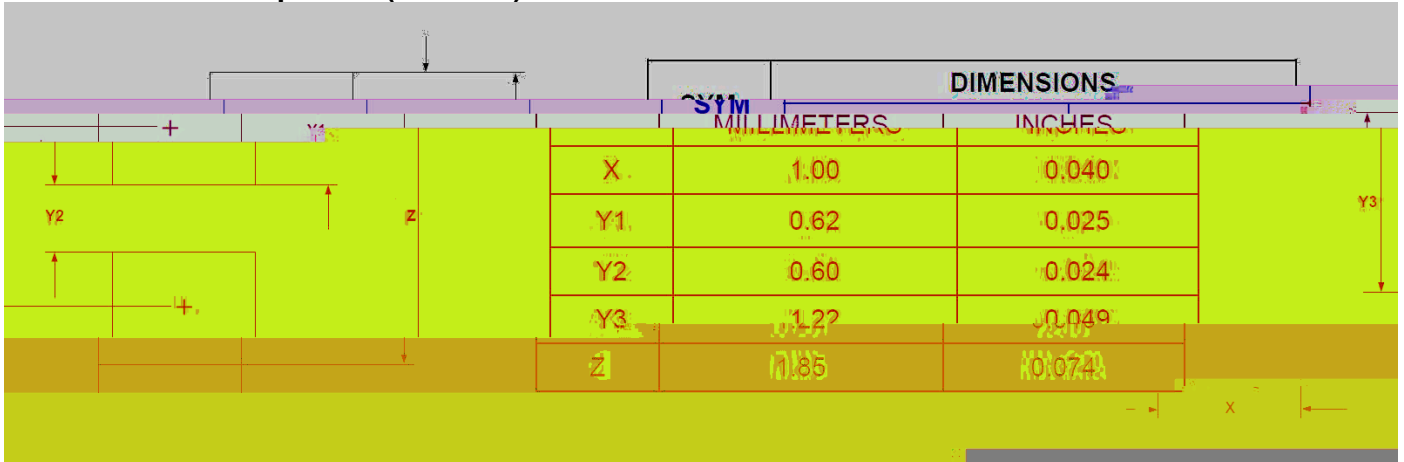

### Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.



# ESD7V0P6A THRU ESD15VP6A

---

## Disclaimer

The information presented in this document is for reference onl