



Stand-off voltage: 24V Max  
 Transient protection for each line according to  
 IEC61000-4-2(ESD):  $\pm 30\text{kV}$  (contact)  
 IEC61000-4-5(surge): 5A (8/20 $\mu\text{s}$ )  
 Low leakage current  
 Low clamping voltage  
 Low clamping voltage:  
 $V_{CL} = 30\text{V typ. @ IPP} = 16\text{A (TLP)}$   
 RoHS Compliant

Cellular Handsets and Accessories  
 Personal Digital Assistants  
 Notebooks and Handhelds  
 Portable Instrumentation  
 Digital Cameras  
 Peripherals  
 Audio Players

Package: DFNO603-2L  
 Case Material: "Green" Molding Compound  
 Moisture Sensitivity: Level 3 per J-STD-020  
 P  $\text{\AA}$  M




CL = Device Marking Code

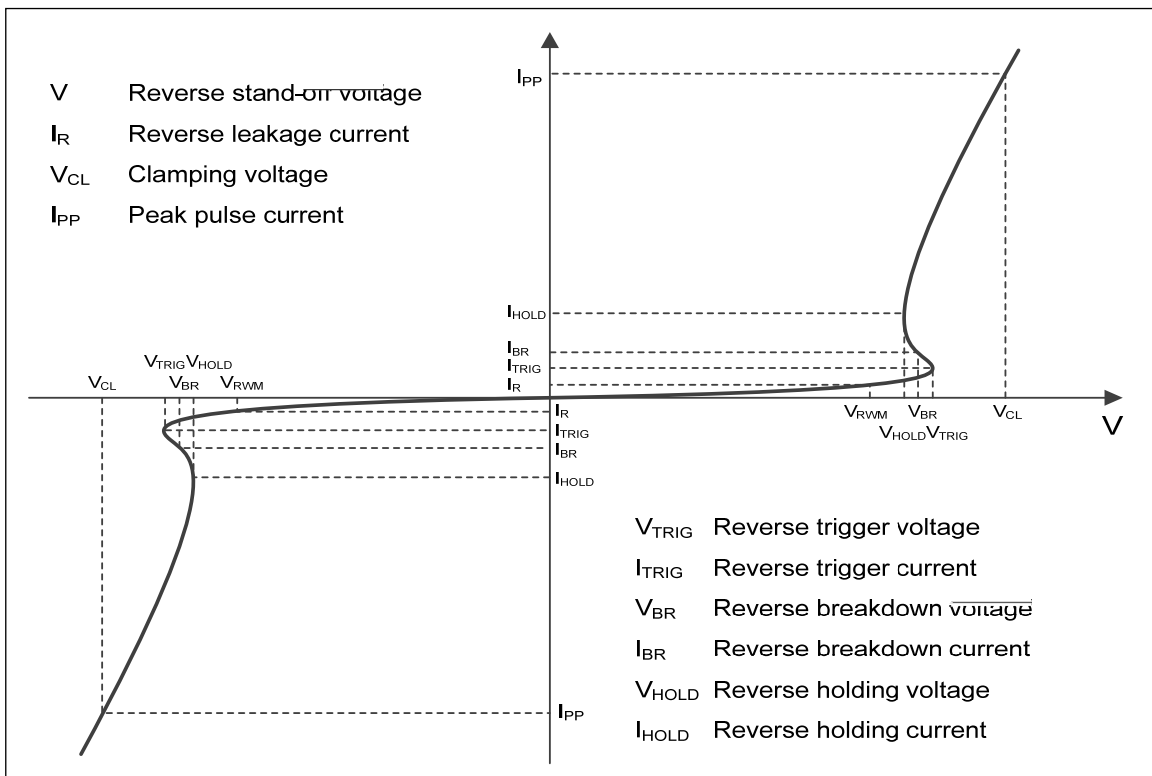





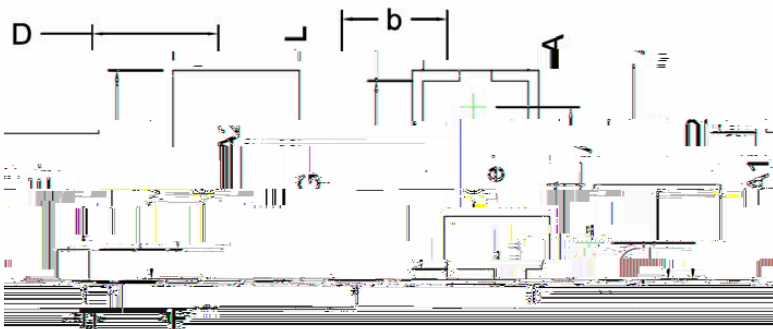

	0.25	0.30	0.35
	0.55	0.60	0.67
	0.28	0.30	0.32
	0.102 BSC		
			0.05
	0.005		

Unit:mm

