



4-Line, Uni-directional, Ultra-low Capacitance, Transient Voltage Suppressor

Features

- Operating voltage: 5V
- Transient protection for each line according to
IEC61000-4-2(ESD): $\pm 30\text{kV}$ (contact)
IEC61000-4-5(surge): 12A (8/20 μs)
- Ultra low capacitance: $C_j=3.5\text{pF}$ typ
- Ultra low leakage
- Low clamping voltage
- Up to 4 lines protects
- RoHS Compliant

Applications

- USB 2.0
- Video Graphics Cards
- DVI
- IEEE 1394
- Monitors and Flat Panel Displays
- 10/100 Ethernet
- NotebookS

Mechanical Data

- Package: SOT-23-6L
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below


■Definitions of electrical characteristics

V0D[LPXP 5DWLQJV


3\$5\$0(7(5	6<0%2/	/,0,76	81,7
-------------	--------	--------	------

3HDD[SIX\$X\$V\$R\$Z\$H\$X\$E\$G\$S@!!• dr4 äÀ •

Fig.7 ESD clamping
(+8kV contact discharge per IEC61000-4-2)



■ Outline Dimensions

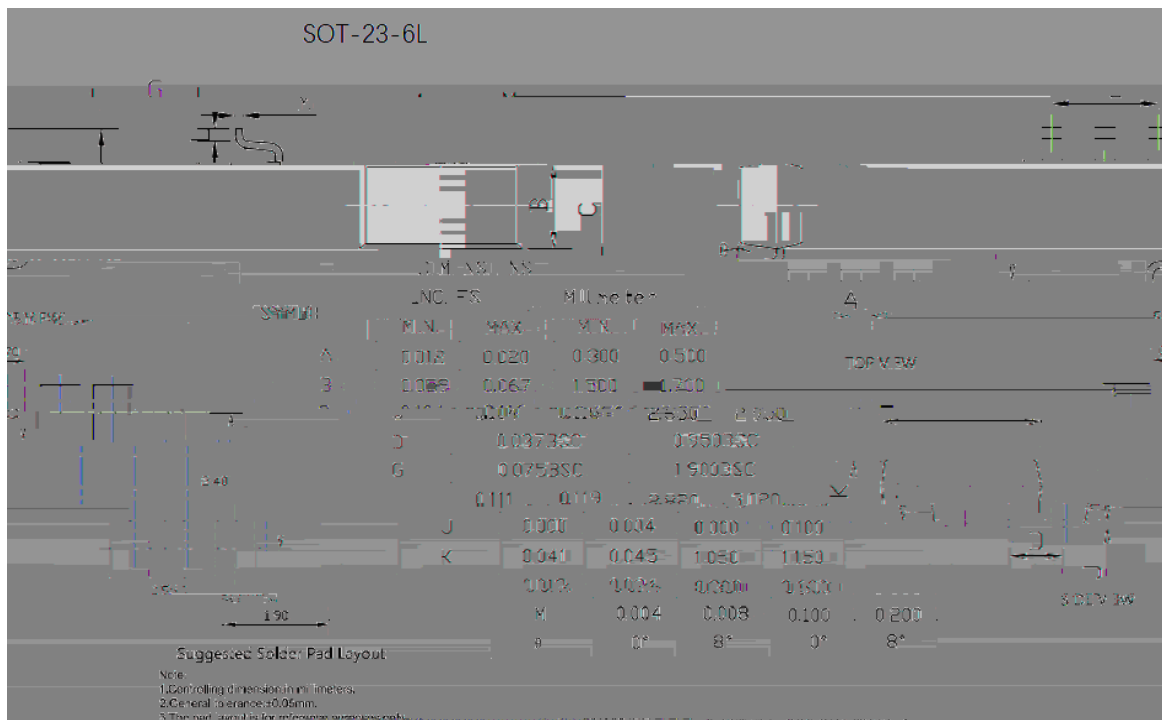



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.