


4-Line, Uni-directional, low Capacitance TVS Diode Array

Features


Applications

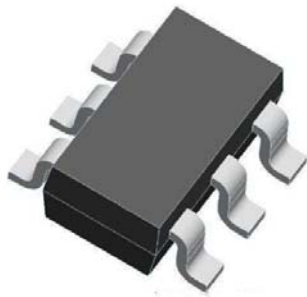

SOT-23-6L



Definitions of electrical characteristics

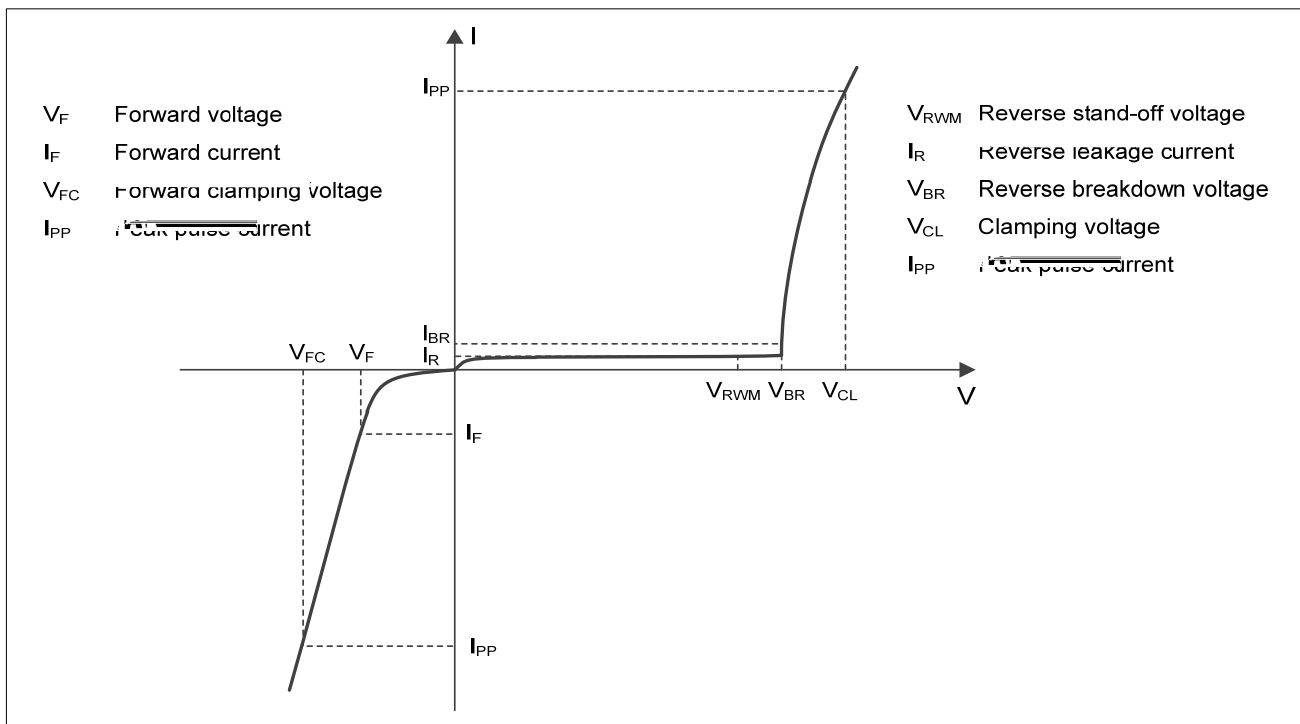



Absolute Maximum Ratings

PARAMETER	SYMBOL	Rating	UNIT

Electrical Characteristics

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
3)						

M





SRV05-4L

Fig.7 ESD clamping - I/O to GND
(+8kV contact discharge per IEC61000-4-2)

Fig.8 TLP Measurement
(Any I/O pin to ground)

SOT-23 6L Package Outline Drawing



SRV05-4L

Disclaimer
