

M>6)8\$;\$*<E'

			MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
--	--	--	----------------------	-------------------------	----------------------------	---------------



M>6)8\$; \$* <E'

9`YWhf]WU`7 \UfUWhYf]gh]Wg' (T_J=25 unless otherwise noted)

DUfU a YhYf'	Gm a Vc''	7cbX]h]cbg'	A]b'	Hmd'	AUI'	I b]hg'
GhUh]W'DUfU a YhYf'						

M>6)8\$;\$*<E'

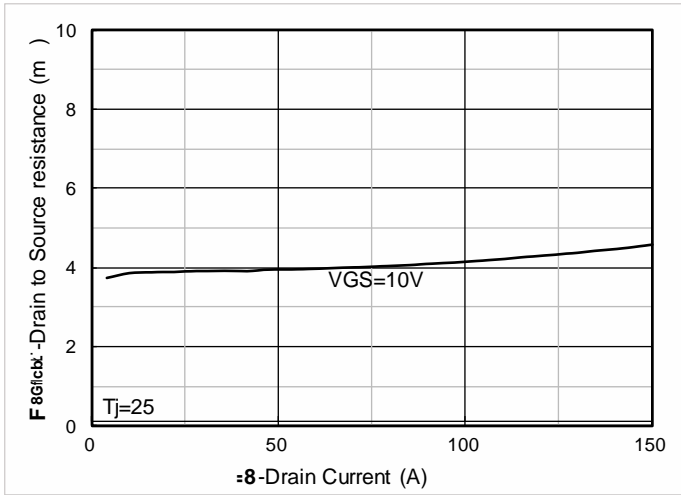


Figure 7: RDS(on) VS Drain Current

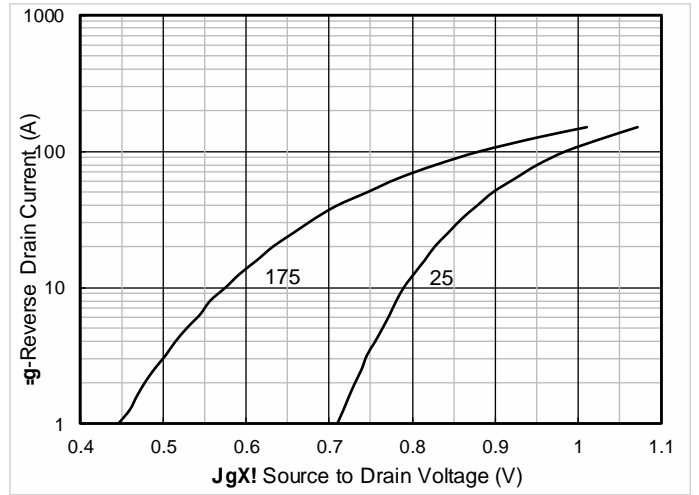


Figure 8: Forward characteristics of reverse diode

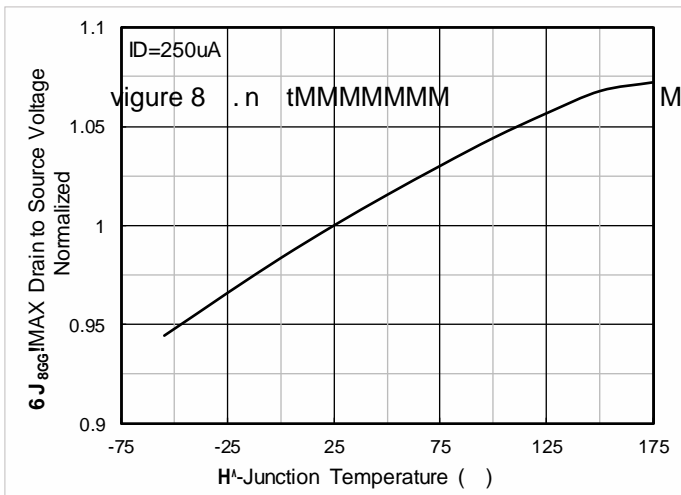


Figure 9: Normalized Drain-Source Voltage


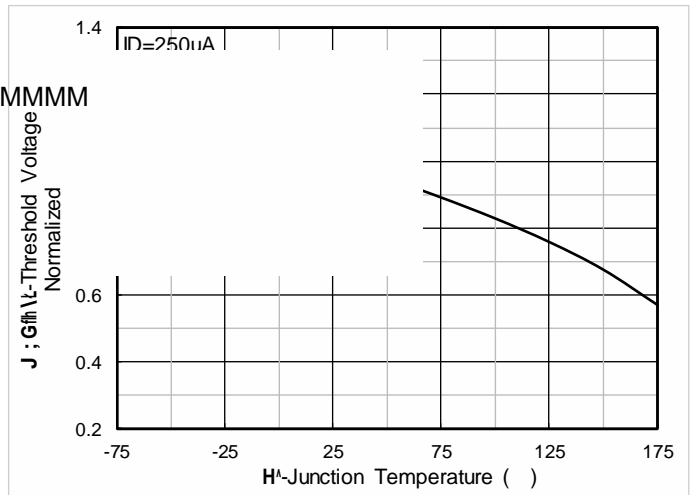


Figure 10: Normalized Threshold Voltage



M>6)8\$; \$* <E'

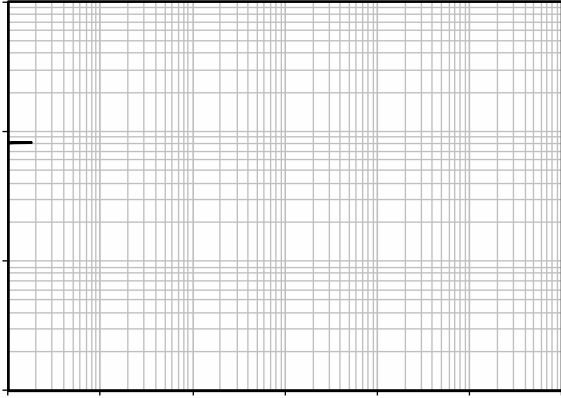

HC!&* '!<M'DUW_U[Y']bZcf a Uh]cb

SYMBOL	MIN.	
	A2	0.000
b2		0.050
c		
c2		
D2		
E		
E1		

