



N-Channel Enhancement Mode Field Effect Transistor

Product Summary


- V_{DS} 120V
- I_D 90A
- $R_{DS(ON)}$ (at $V_{GS}=10V$) 9m Ω
- $R_{DS(ON)}$ (at $V_{GS}=6V$) 12m Ω
- 100% EAS Tested
- 100% VDS Tested

General Description

- Split gate trench MOSFET technology
- Excellent package for heat dissipation
- High density cell design for low $R_{DS(ON)}$
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free

Applications

- Power switching application
- Uninterruptible power supply
- DC-DC convertor

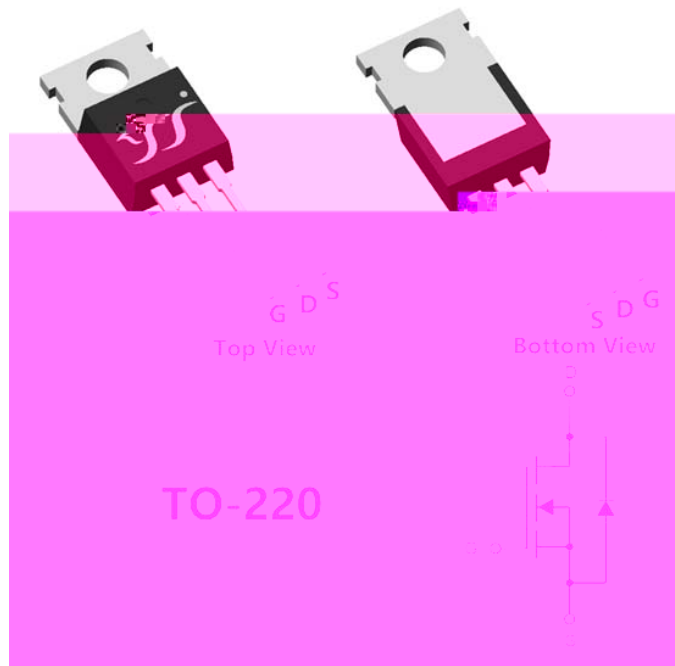■ Absolute Maximum Ratings ($T_A=25$ unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-source Voltage		V_{DS}	120	V
Gate-source Voltage		V_{GS}	± 20	V
Drain Current	$T_A=25$	I_D	12	A
	$T_A=100$		7.5	
	$T_C=25$		90	
	$T_C=100$		56	
Pulsed Drain Current ^A		I_{DM}	360	A
Avalanche energy ^B		EAS	462.25	mJ
Total Power Dissipation ^C	$T_A=25$	P_D	3.5	W
	$T_A=100$		1.4	
	$T_C=25$		147	
	$T_C=100$		58	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 +150	

■ Thermal resistance

Parameter		Symbol	Typ	Max	Units
Thermal Resistance Junction-to-Ambient ^D	Steady-State	$R_{\theta JA}$	28	35	/W
Thermal Resistance Junction-to-Case	Steady-State	$R_{\theta JC}$	0.7	0.85	

				QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJP90G12H	B1	YJP90G12H	50	/	5000	Tube





YJP90G12H


■ Electrical Characteristics ($T_J=25$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	120	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=120V, V_{GS}=0V$	-	-	1	μA
		$V_{DS}=120V, V_{GS}=0V, T_J=150$	-	-	100	



■Typical Electrical and Thermal Characteristics Diagrams

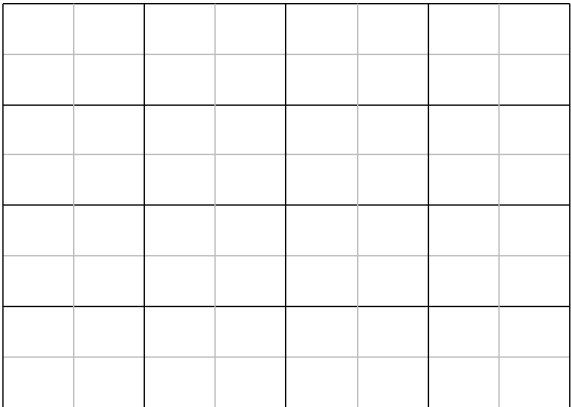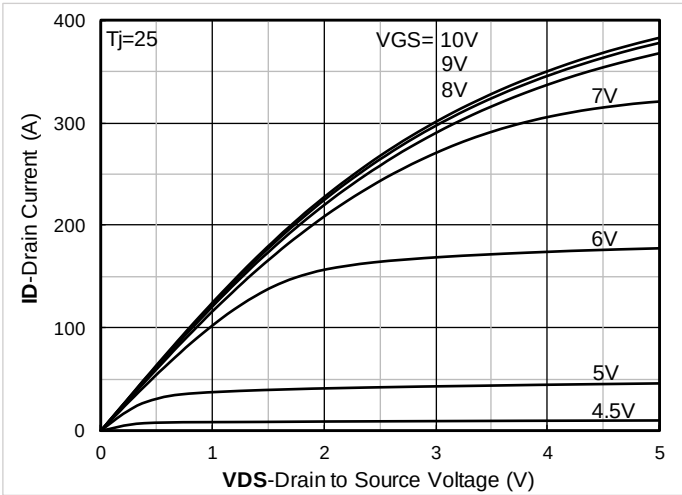

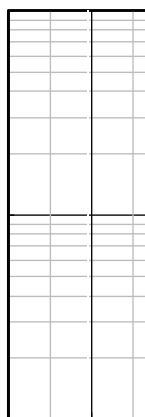


YJP90G12H



YJP90G12H

■ TO-220AB-C Package information

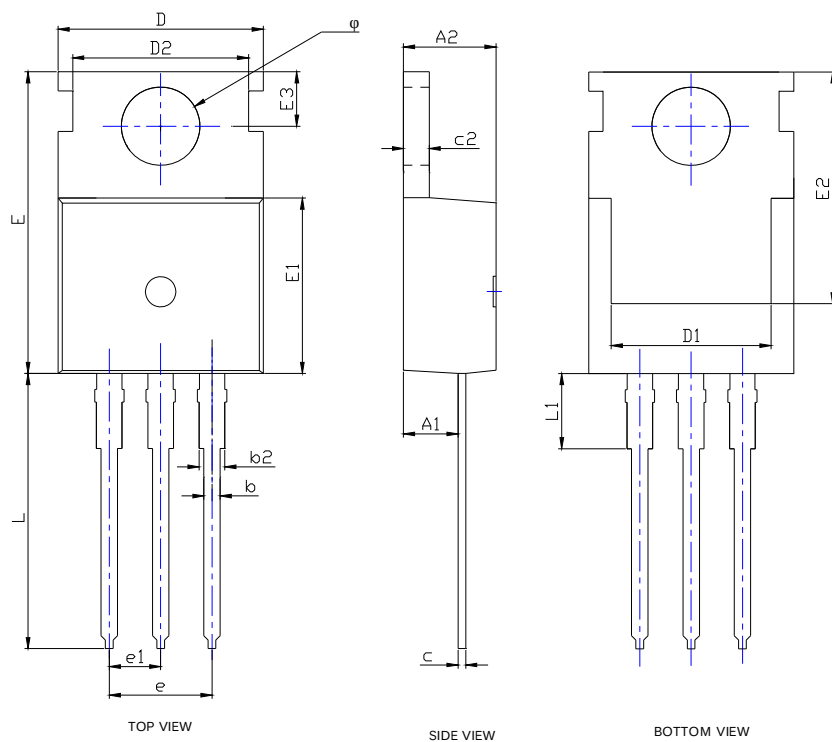

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A1	0.091	0.098	2.300	2.500
A2	0.173	0.181	4.400	4.600
b	0.028	0.035	0.700	0.900
b2	0.049	0.056	1.250	1.420
c	0.018	0.022	0.450	0.550
c2	0.049	0.053	1.250	1.350
D	0.382	0.402	9.700	10.200
D1	0.299	0.		

NOTE:
1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machine).