




ESD1CAN24T2Q

RoHS
COMPLIANT

5 Max Peak Pulse Power 300 W per Line (tp = 8/20 us)
5 Low C

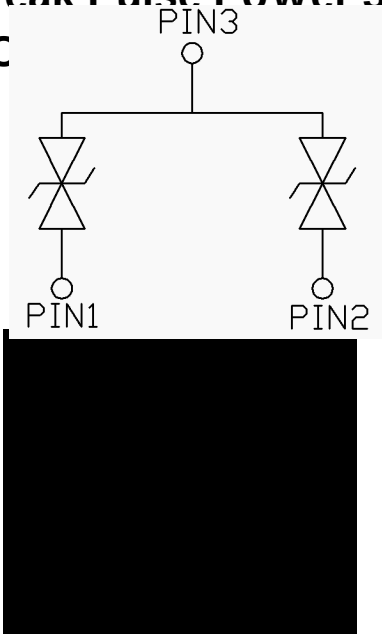

SOT-23

IEC 61000-4-2
c = 40 V @ I = 1 A

Applications

Mechanical Data

Case:
Terminals:

Marking

Maximum Ratings

PARAMETER	SYMBOL	UNIT	VALUE


Electrical Characteristics

Item	Symbol	Unit	Conditions	Min	Typ	Max





ESD1CAN24T2Q

■ Outline Dimensions

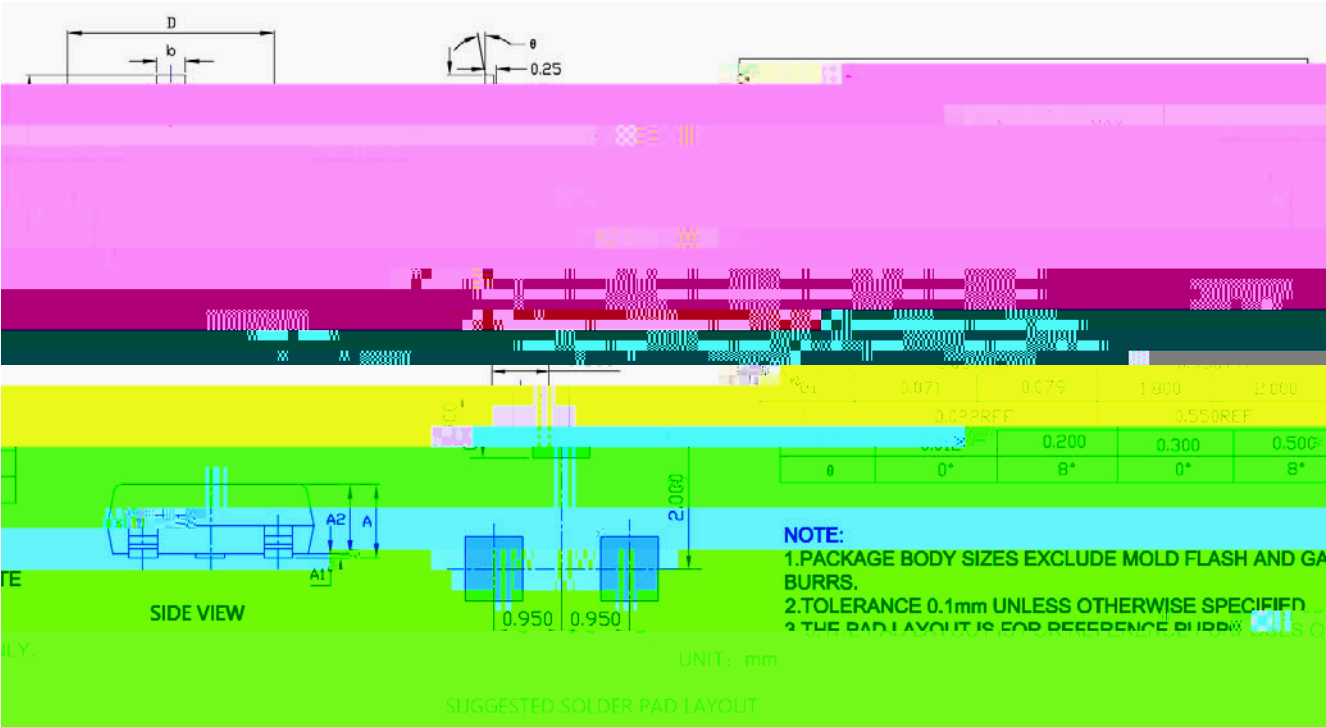

Marking Information

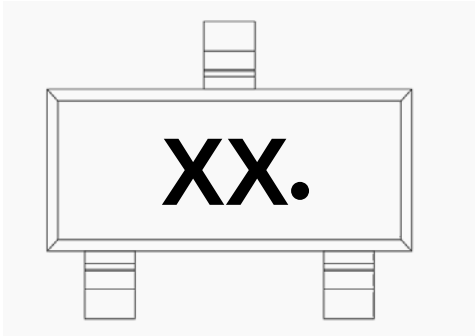



ESD1CAN24T2Q

Disclaimer
