



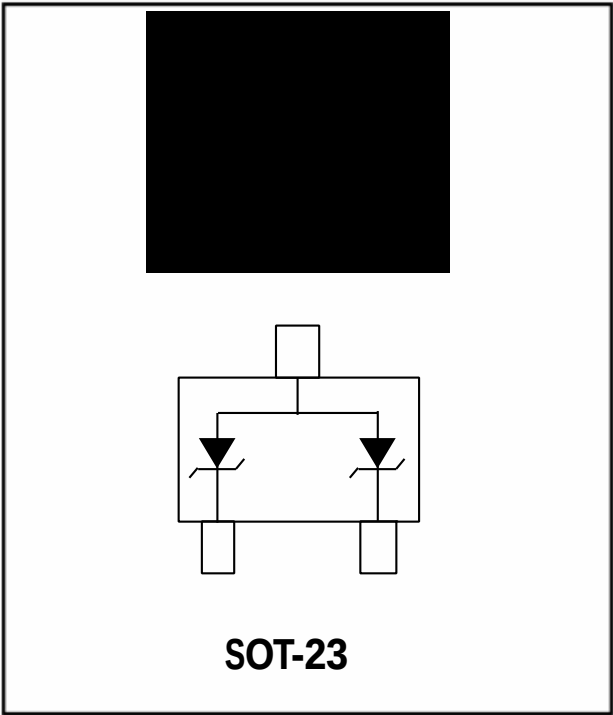

Reverse sPMnd - off vol IPMge
 I_R Reverse leMkMge currenP
 V_{BR} ReverseNr eMkdown vol IPMge
 V_C C IMnping vol IPMge
 I_P PeMk pulse currenP
 I_F ForwMr d CurrenP
 V_F ForwMr d V_F IPMge@ I

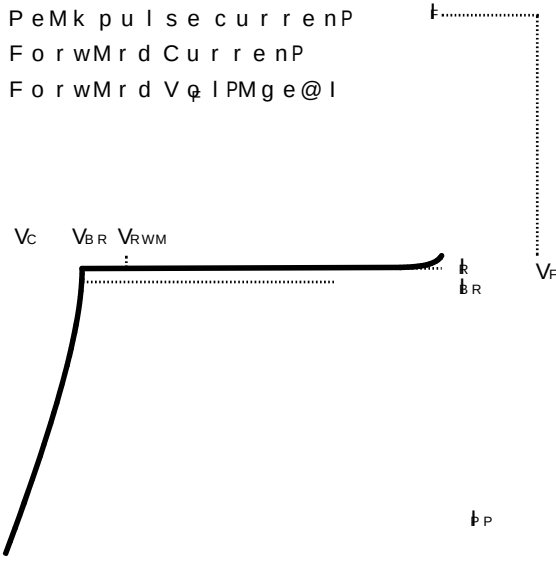


PARAMETER	SYMBOL	LIMITS	UNIT
Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	300	W
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	KV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	-55~150	

Storage temperature 1 0

v & KDUDFWWHULVWLFV 7\SLFDO

)LJ &DSDFLWDQFH YV %LD

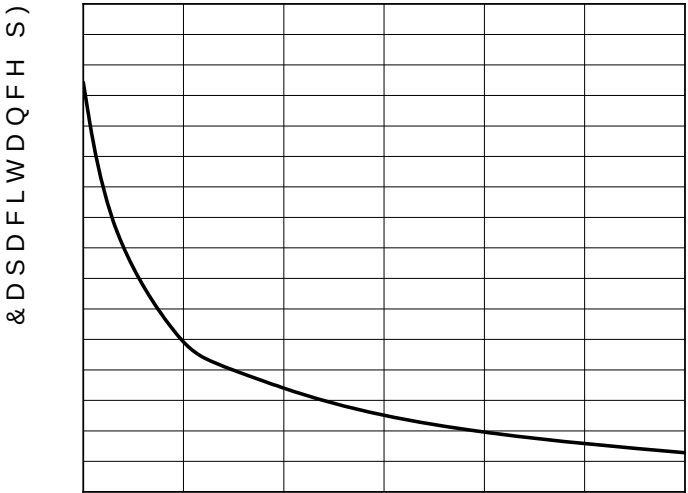


%LDV 9ROWDJH 9

)LJ 3RZHU 'HUDWLQJ &XUWH



)LJ V 3XOVH :DYHIRUP

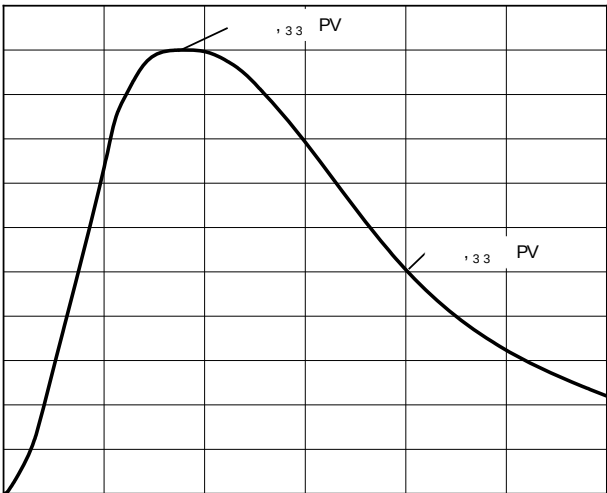

3HDN 3XOVH &XUWH

7LPV

\$PELHQW 7HPSHUDWXUH 7

