




Silic Carbide Schottky Diode

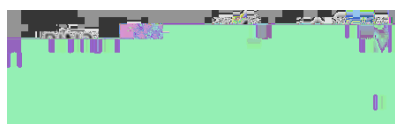

- **Package:** TO-252
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads
- **Polarity:** As marked

■ **Maximum Ratings** (T_{ref}=25°C) (Surge Peak)

1 / 5



■Electrical Characteristics

PARAMTETER	SYMBOL	UNIT	TEST CONDITIONS	Typ.	Max.
Forward voltage drop	V_F	V	$I_F=20A, T_j$		

v2XWOLQH 'LPHQVLRQV

