
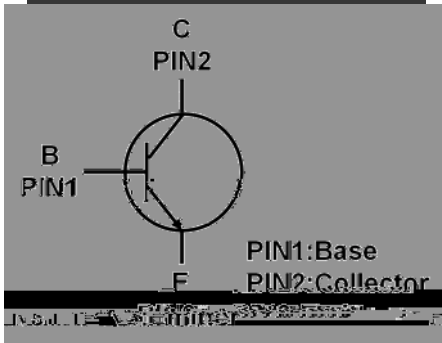


NPN Transistor

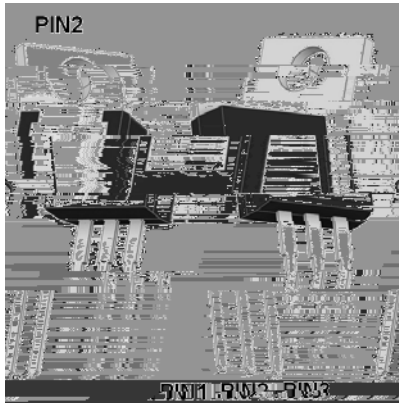

Features

- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free

Applications

- Complement to TIP127L
- High DC Current Gain

Mechanical Data

- Package: TO-220AB
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Unit Weight: 1.9g

■ Maximum Ratings (Ta=25 unless otherwise noted)

Item	Symbol	Unit	Value
Device marking code			TIP122L
Collector-base voltage	V_{CBO}	V	100
Collector-emitter voltage	V_{CEO}	V	100
Emitter-base voltage	V_{EBO}	V	5
Collector current	I_C	A	5
Power dissipation (*)	P_D	W	2
Thermal resistance, junction-to-ambient (*)	R_{thJA}	/W	35
Junction temperature	T_j		-55 to +150
Storage temperature	T_{STG}		-55 to +150


(*) Device mounted on PCB with minimum recommended pad layout and additional heat sink (25mm x 23mm x 15mm) attached.



■ Electrical Characteristics (Ta=25 unless otherwise noted)






Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C = 1mA, I_E = 0$	100		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C = 30mA, I_B = 0$	100		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E = 2mA, I_C = 0$	5		
Collector-base cut-off current	I_{CBO}	mA	$V_{CB} = 100V$			0.2
Collector cutoff current	I_{CEO}	mA	$V_{CE} = 50V$			0.5
Emitter-base cut-off current	I_{EBO}	mA	$V_{EB} = 5V$			2
DC current gain	h_{FE}		$V_{CE} = 3V, I_C = 0.5A$	1000		
			$V_{CE} = 3V, I_C = 3A$	1000		
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C = 3A, I_B = 12mA$			2.0
			$I_C = 5A, I_B = 20mA$			4.0
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	V	$I_C = 3A, I_B = 12mA$			3.0
			$I_C = 5A, I_B = 20mA$			4.0
Base-Emitter Voltage	V_{BE}	V	$V_{CE} = 3V, I_C = 3A$			2.5
Collector-base output capacitance	C_{ob}	pF	$V_{CB} = 10V, I_E = 0A, f = 1MHz$		60	

■ Characteristics(Typical)

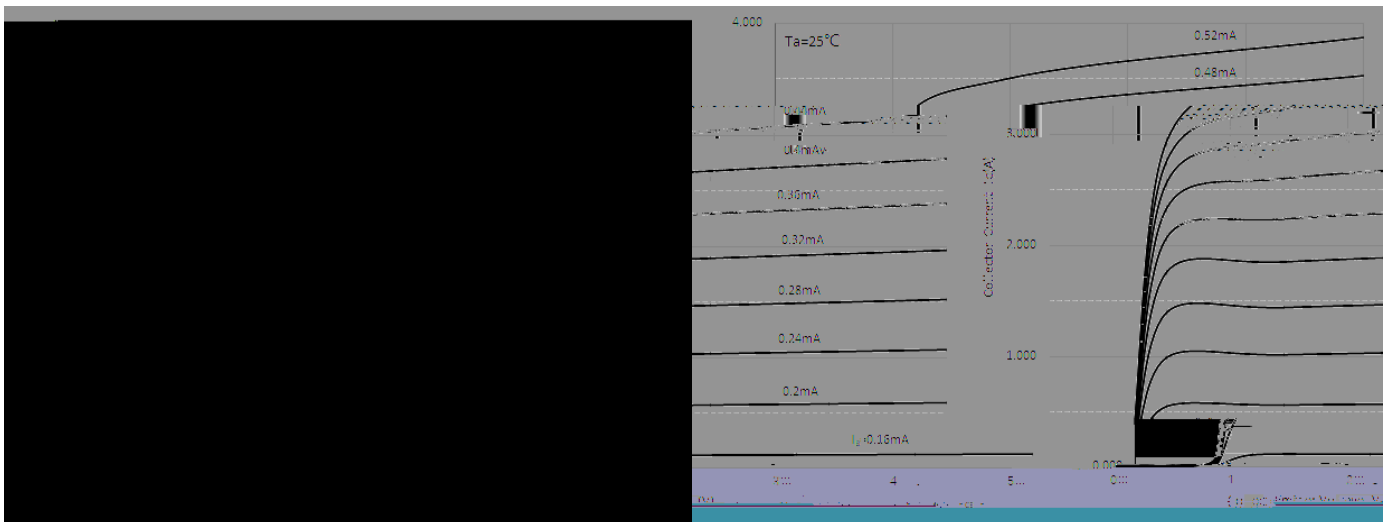



■ Characteristics(Typical)

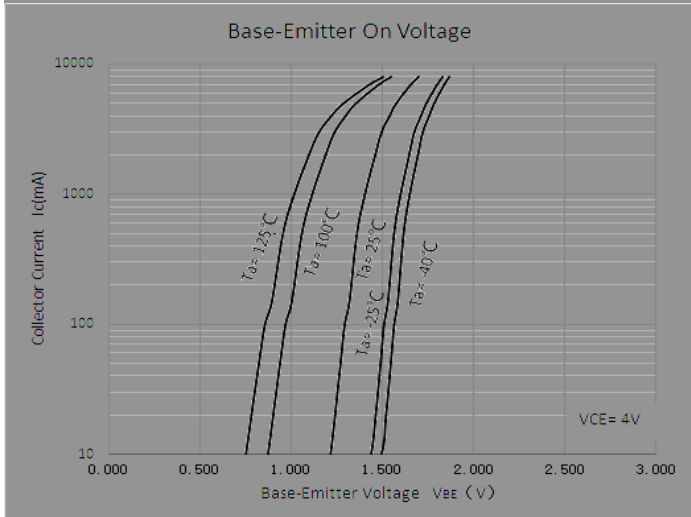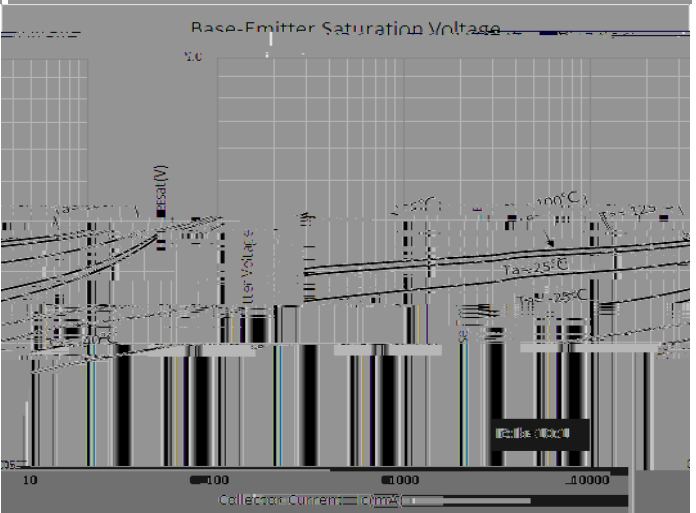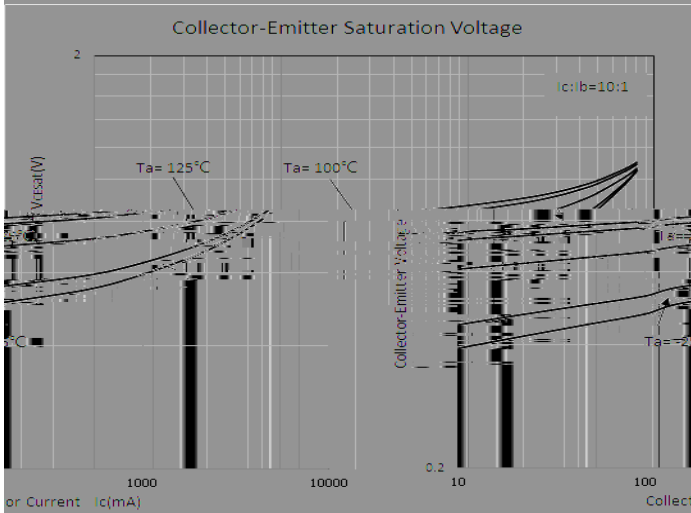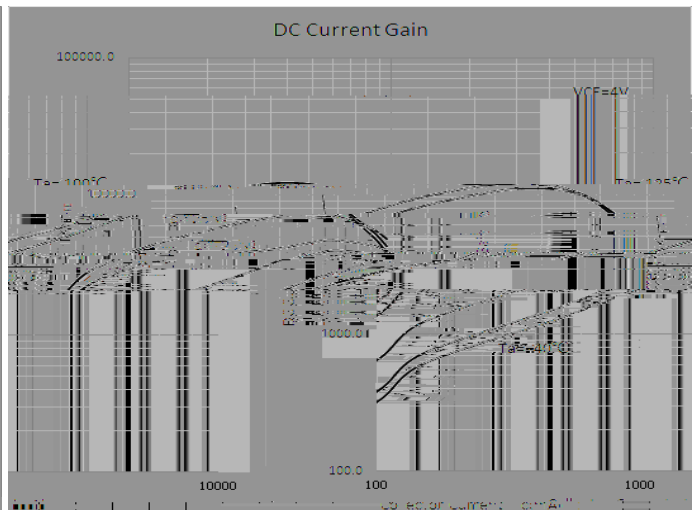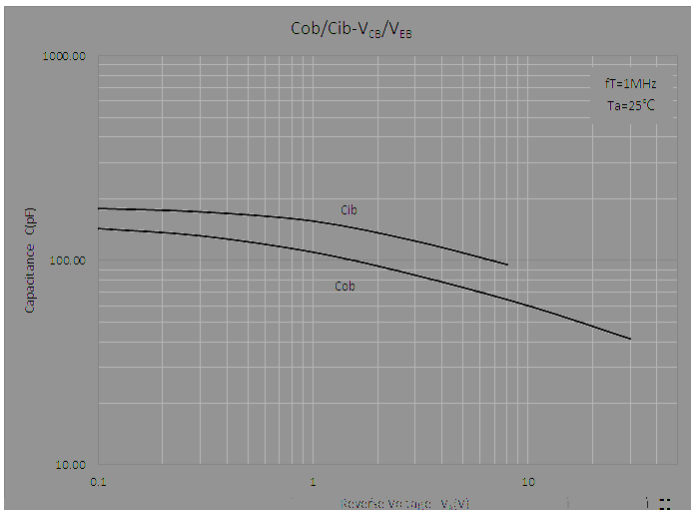

v 2 U G H U L Q J , Q I R (U B B W Q R Q

35() (5(' 3 1	3\$&.,1* &2' (	0,1,080 3\$&.\$*(SFV	,11(5 %2; 48\$17,7< SFV	287(5 &\$572 48\$17,7< SF	
---------------	----------------	--------------------------	----------------------------	------------------------------	--

