

BC856T/BC857T/BC858T

Mechanical Data

Package: SOT-523

Terminals: Tin plated leads, solderable per
J-STD-002 and JESD22-B102

Marking:

Maximum Ratings (Ta=25 Unless otherwise specified)

Symbol	Parameter	Value	Unit
--------	-----------	-------	------

V_{CB0}



BC856T/BC857T/BC858T


Electrical Characteristics (Ta=25 unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage BC856T BC857T BC858T	V_{CBO}	$I_C = -10\mu A, I_E = 0$	-80		

BC856T/BC857T/BC858T



SOT-523 Package Outline Dimensions

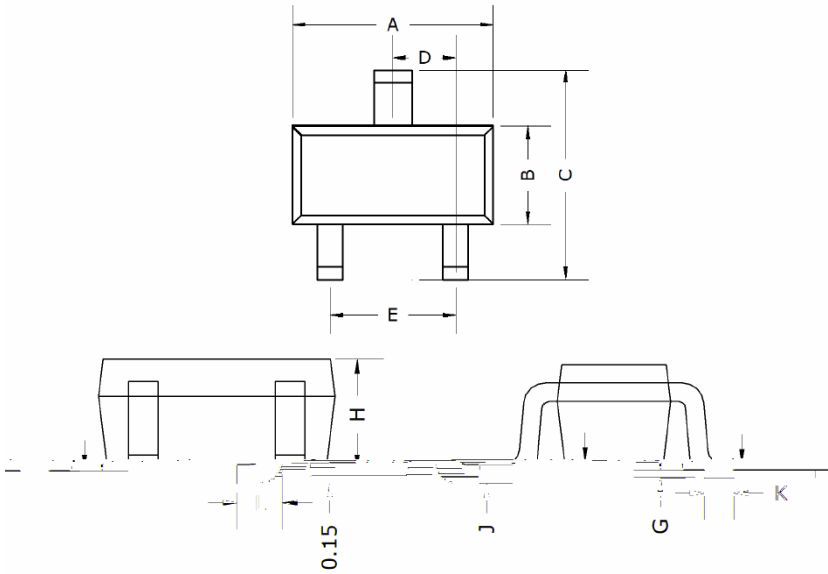



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.