



## Surface Mount High Efficient Rectifier



### Mechanical Data

- **Package:** DO-214AA (SMB)  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

### ■Maximum Ratings (T<sub>a</sub>=25 Unless otherwise specified

| PARAMETER                                                                                   | SYMBOL           | UNIT | HS3QB      |
|---------------------------------------------------------------------------------------------|------------------|------|------------|
| Device marking code                                                                         |                  |      | HS3QB      |
| Maximum Repetitive Peak Reverse Voltage                                                     | V <sub>RRM</sub> | V    | 1200       |
| Maximum RMS Voltage                                                                         | V <sub>RMS</sub> | V    | 840        |
| Maximum DC blocking Voltage                                                                 | V <sub>DC</sub>  | V    | 1200       |
| Average rectified output current<br>@60Hz sine wave, Resistance load, TL (FIG.1)            | I <sub>O</sub>   | A    | 3.0        |
| Forward Surge Current (Non-repetitive)<br>@60Hz Half-sine wave, 1 cycle, T <sub>j</sub> =25 | I <sub>FSM</sub> | A    | 80         |
| Forward Surge Current (Non-repetitive)<br>@1ms, <sup>a</sup> Junction temperature           | T <sub>j</sub>   |      | -55 ~ +150 |

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|



## HS3QB

### ■Electrical Characteristics $T_a=25$ Unless otherwise specified


| PARAMETER                                               | SYMBOL   | UNIT    | TEST CONDITIONS                                           | HS3QB |
|---------------------------------------------------------|----------|---------|-----------------------------------------------------------|-------|
| Maximum instantaneous forward voltage                   | $V_F$    | V       | $I_{FM}=3.0A$                                             | 2.4   |
| Maximum reverse recovery time                           | $t_{rr}$ | ns      | $I_F=0.5A, I_R=1.0A,$<br>$I_{rr}=0.25A$                   | 75    |
| Maximum DC reverse current at rated DC blocking voltage | $I_R$    | $\mu A$ | $T_j=25$                                                  | 5     |
|                                                         |          |         | $T_j=125$                                                 | 100   |
| Typical junction capacitance                            | $C_j$    | pF      | Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C | 23    |

### ■Thermal Characteristics $T_a=25$ Unless otherwise specified

| PARAMETER | SYMBOL | UNIT | HS3QB |
|-----------|--------|------|-------|
|-----------|--------|------|-------|



FIG.3: Forward characteristics

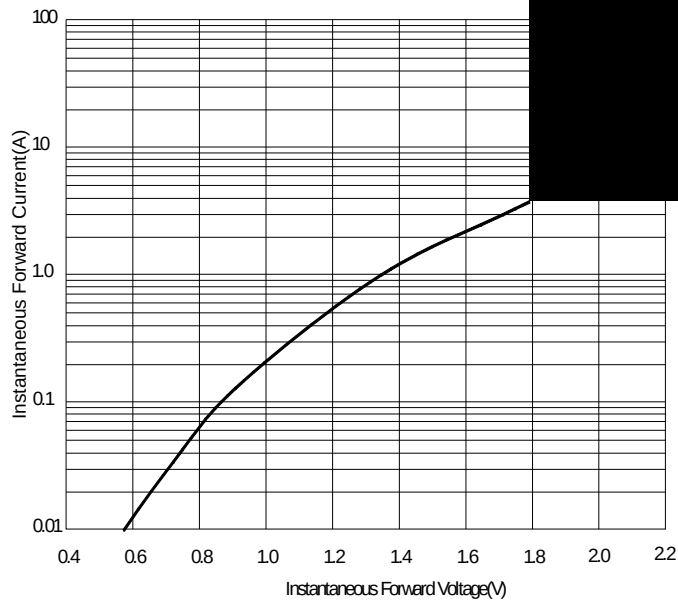

#### ■Ordering Information (Example)

| PREFERRED P/N | PACKAGE CODE | UNIT WEIGHT(g)    | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|---------------|--------------|-------------------|----------------------|-------------------------|----------------------------|---------------|
| HS3QB         | F1           | Approximate 0.096 | 3000                 | /                       | 48000                      | 13" reel      |
| HS3QB         | F2           | Approximate 0.096 | 750                  | 6000                    | 24000                      | 7" reel       |
| HS3QB         | F3           | Approximate 0.096 | 500                  | 4000                    | 16000                      | 7" reel       |



## ■ Outline Dimensions

| DO-214AA(SMB) |      |      |
|---------------|------|------|
| Dim           | Min  | Max  |
| A             | 1.85 | 2.15 |
| B             | 3.30 | 3.94 |
| C             | 4.05 | 4.75 |
| D             | 1.99 | 2.61 |
| E             | 5.21 | 5.59 |
| F             | 0.90 | 1.41 |
| G             | 0.05 | 0.20 |
| H             | 0.15 | 0.31 |

## ■Suggested Pad Layout

| DO-214AA (SMB) |             |
|----------------|-------------|
| Dim            | Millimeters |
| P1             | 6.8         |
| P2             | 4.3         |
| P3             | 1.8         |
| Q1             | 2.5         |
| Q2             | 2.3         |

Dimensions in millimeters



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety