


Ultra-Fast Recovery Diodes 5A*2 FRED

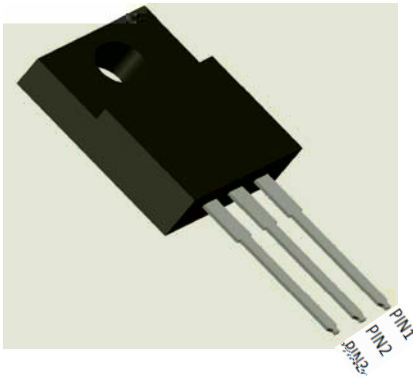

Features

- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** ITO-220AB
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings (Tj=25 Unless otherwise specified

Repetitive Peak Reverse Voltage	V_{RRM}	V	400
Average Rectified Output Current @60Hz sine wave, R-load, Tc(FIG.1)	I_o	A	10
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, Tj=25	I_{FSM}	A	50
Current Squared Time @1ms≤t≤8.3ms Tj=25	I^2t	A ² s	10
Storage Temperature	Tstg		-55 ~ +175
Junction Temperature	Tj		-55 ~ +175
Typical Junction capacitance @4V,1MHz	Cj	pF	50
Mounting torque @recommend torque 5kg cm	Tor	kg cm	8






trr

0



MUR1040FCT

■Outline Dimensions

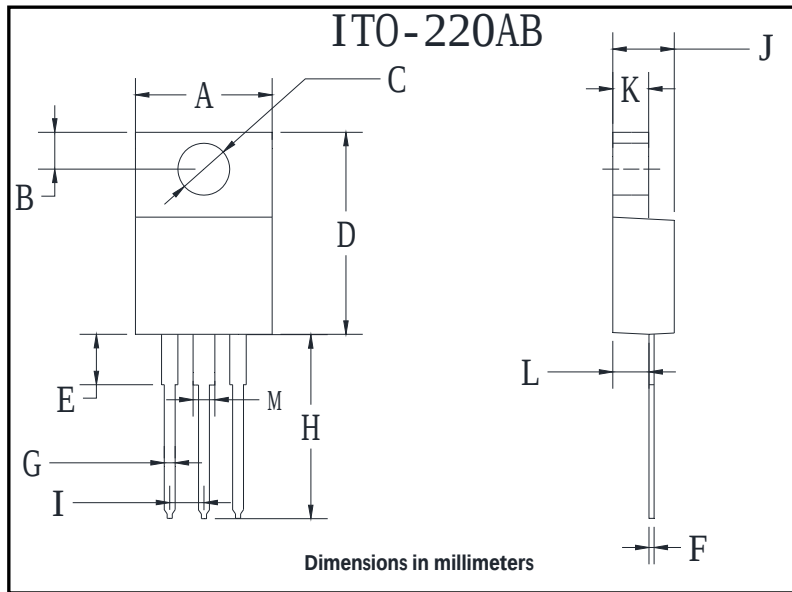

ITO-220AB		
Dim	Min	Max
A	9.8	10.2
B	2.25	2.75
C	2.95	3.45
D	14.75	15.25
E	3.05	3.95
F	0.45	0.75
G	0.45	0.75
H	13.4	14.2
I	2.35	2.75
J	4.3	4.8
K	2.58	2.82
L	2.58	2.82
M	1.47	1.77



MUR1040FCT

Disclaimer

The information presented in this document is for reference only. It does not constitute a contract or a warranty. The information is subject to change without notice.