



- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

- : ITO-220AC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- : Tin plated leads, solderable per J-STD-002 and JESD22-B102
- : As marked

(T_j=25 Unless otherwise specified

Device marking code			MUR840F
Repetitive Peak Reverse Voltage	V _{RRM}	V	400
Average Rectified Output Current @60Hz sine wave, R-load, T _c (FIG.1)	I _O	A	8
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, T _j =25	I _{FSM}	A	100
Storage Temperature	T _{stg}		-55 ~ +175
Junction Temperature	T _j		-55 ~ +175
Typical _ # MMM ® @recommend torque 5kg cm	Tor	5 kg cm	8



■

--	--	--	--	--	--	--

Instantaneous forward voltage drop per diode


V_{FM}

V

I_{FM}




- (Typical)





■

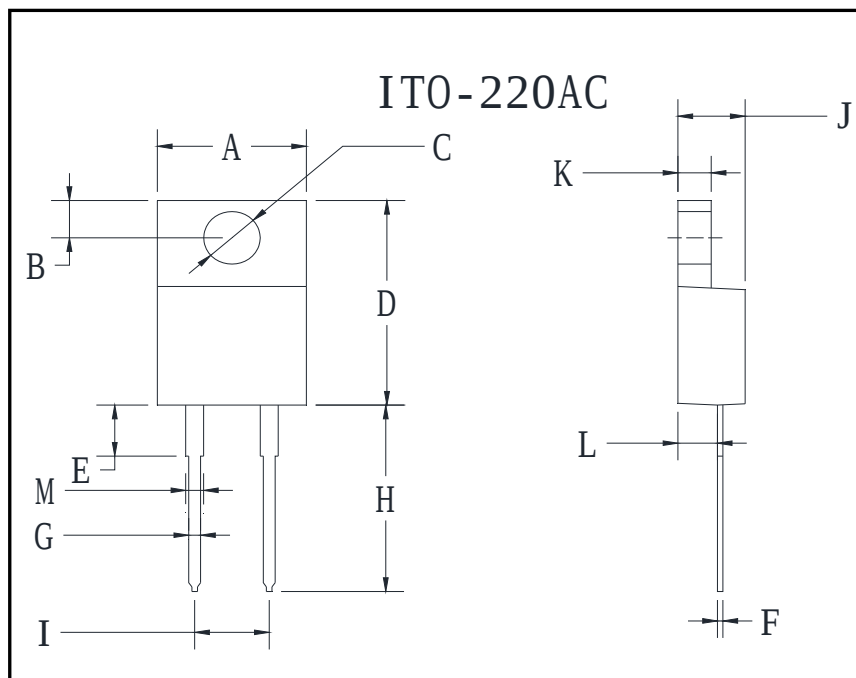

Dim	Min	Max
A	9.8	10.2
B	2.25	2.75
C	2.95	3.45
D	14.75	15.25
E	3.5	4.1
F	0.45	0.75
G	0.45	0.75
H	13.35	14.15
I	4.97	5.23
J	4.3	4.8
K	2.5	2.74
L	2.58	2.82
M	1.03	1.43
