



Surface Mount Fast Recovery Rectifier

Features


- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Fast reverse recovery time
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in high frequency rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.

Mechanical Data

- **Package:** SMBF
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-020
Cathode pin denotes the cathode end



■Maximum Ratings (T_a=25 Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	GR4MBF
Device marking code			GR4MBF
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	V	1000
Maximum RMS Voltage	V _{RMS}	V	700
Maximum DC blocking Voltage	V _{DC}	V	1000
Average rectified output current @60Hz half-sine wave, resistance load, TC (Fig.1)	I _O	A	4.0
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T _j =25	I _{FSM}	A	120
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, T _j =25			

Junction temperature	T _j		-55 ~ +150

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GR4MBF
	I _R	μA	T _j =25	5.0
			T _j =125	100 μA



GR4MBF

■ Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	GR4MBF
Typical Thermal resistance	$R_{\theta J-A}^{(1)}$	/W	60
	$R_{\theta J-L}^{(1)}$		20
	$R_{\theta J-C}^{(1)}$		15

Note:
(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

■ Characteristics (Typical)

FIG1 I_o - T_c Curve

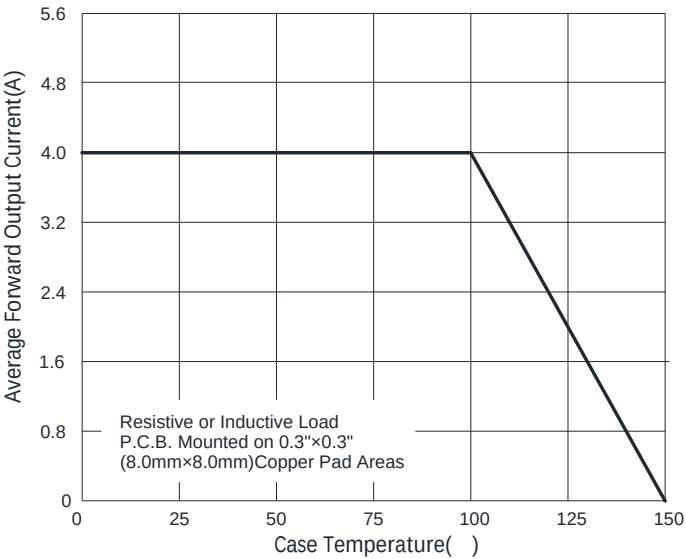


FIG3

Instantaneous Forward Current(A)




SMBF



Dimensions in millimeters

■ Suggested pad layout

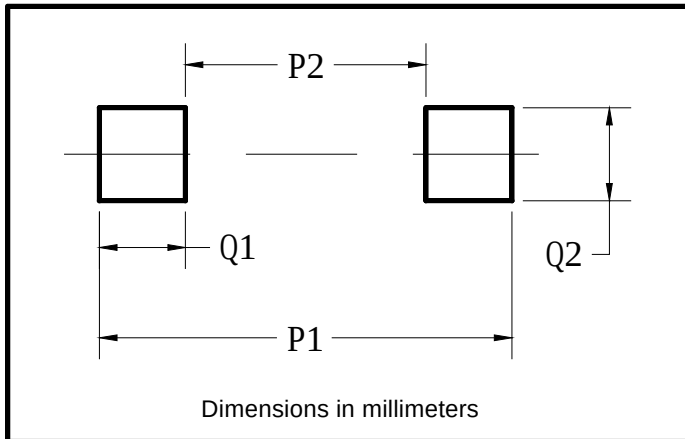

Dim	Milimeters
P1	6.20
P2	2.40
Q1	1.90
Q2	2.20



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.