

# ZP1350-RECTIFIER DIODE

Jiangsu Yangjie Runau Semiconductor Co.,Ltd

2500-3500V<sub>RRM</sub>


\*\*\*\*\*

## GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

### Features:

- . All Diffused Structure
- . High Surge rating
- . Blocking capability up to 3500 volts
- . Ceramic Housing Hermetic Package
- . Pressure Assembled Device

ZT55cT

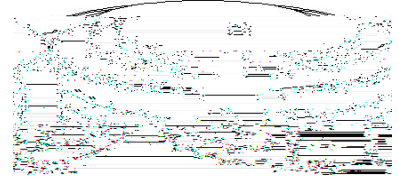

## ELECTRICAL CHARACTERISTICS AND RATINGS

### Reverse Blocking

$V_{RRM}$  = Repetitive peak reverse voltage

$V_{RSM}$  = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage	$I_{RRM}$	5 mA 50 mA (3)
---------------------------------	-----------	-------------------

### Conducting Assembled Devi

