

ZP2900 - RECTIFIER DIODE

Jiangsu Yangjie Runau Semiconductor Co.,Ltd


2500-3500V_{RRM}

GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All Diffused Structure
- . High Surge rating
- . Blocking capability up to 3500 volts
- . Ceramic Housing Hermetic Package
- . Pressure Assembled Device

ZT70cT

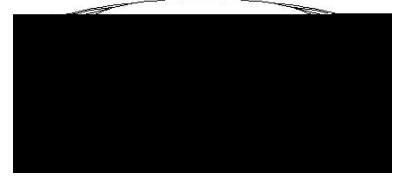

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage	I _{RRM}	5 mA 80 mA (3)
---------------------------------	------------------	-------------------

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	+160		°C	
Storage temperature	T_{stg}	-40	+160		°C	
Thermal resistance - junction to case	$R_{j-c)}$		0.0125		°C/W	Double sided cooled
Thermal resistance - case to heatsink	$R_{-s)}$		0.004		°C/W	Double sided cooled
Mounting force	P	30	37	33	kN	
Weight	W			0.85	kg.	

* Mounting surfaces smooth, flat and greaseless

CASE OUTLINE AND DIMENSIONS

