



Schottky Diodes

Features

enhanced mechanical strength and moisture resistance

term reliability

Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

Typical applications are in ETQq4Sw(Ty)-3(i)tcr Jpin-3(g) p(a)oTye mu3(e)p3(



MBR10100FCT THRU MBR10200FCT-B1-W5094HF


Ordering Information (Example)

	PREFERED P/N	UNIT WEIGHT(g)		INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	
--	--------------	----------------	--	----------------------------	-------------------------------	--

MBR1080FCT THRU MBR10200FCT Approximate 1.6 MBR1010



Outline Dimensions

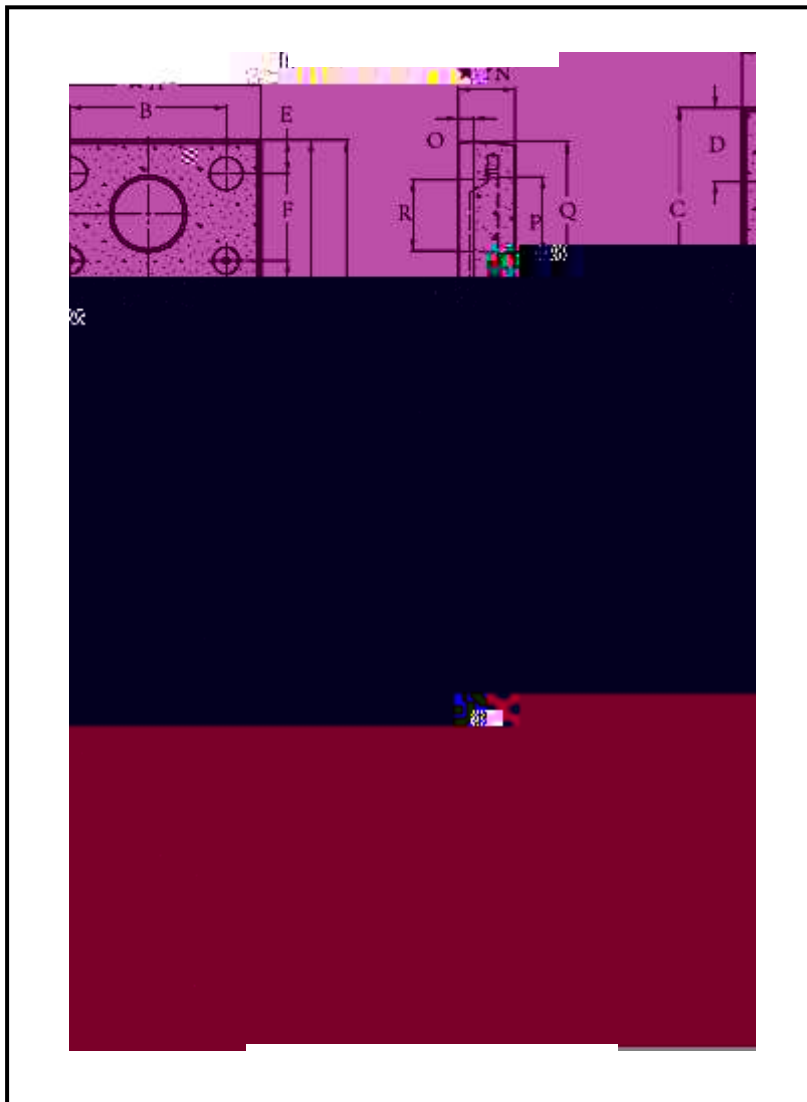

ITO-220AB (W5094)		
Dim	Min	Max
A	10.03	10.23
B	6.90	7.10
C	9.21	9.41
D	3.20	3.40
E	1.40	4.00
F	3.8	0.75
G	15.72	16.02
H	TYP 19.05	
I	TYP 3.18	
J	12.65	13.25
K	1.30	1.50
L	6.50	7.50
M	9.23	9.63
N	2.44	2.64
O	TYP 0.7	
P	3.35	3.55
Q	6.58	6.78
R	3.08	3.28
S	TYP 0.52	
T	2.75	2.95
U	0.40	0.60
V	4.50	4.90
W	0.71	0.91
a	TYP 2.54	



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear