




0D[LPXP 506 9ROWDJH	9506	9							
0D[LPXP '& EORFNLQJ 9ROWDJH9'&		9							
\$YHUDJH UHFWLILHG RXWSXW FXUUHQW # +] VLQH ZDYH 5 ORDG 7F									1.0
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25	IFSM	A							30
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25									60
Current squared time @1ms≤t≤8.3ms Tj=25 , Rating of per diode	I²t	A²s							3.7
Storage temperature	Tstg								-55 ~ +150
Junction temperature	Tj								-55 ~ +150

■Electrical Characteristics T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT		
Maximum DC reverse current at rated DC blocking voltage per diode	I _R	ε A	T _j =25	5
			T _j =125	100
Typical junction capacitance	C _j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	12

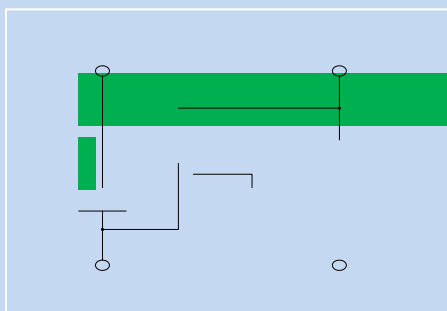

DBL101S THRU DBL107S

■ Thermal Characteristics $T_a=25$ Unless otherwise specified


PARAMETER	SYMBOL	UNIT	DBL101S	DBL102S	DBL103S	DBL104S	DBL105S	DBL106S	DBL107S
Typical Thermal Resistance	R θ J-A	/W	40.0						
	R θ J-L		15.0						
	R θ J-C		8.0						

Note: Device mounted on P.C.B with 35mm*25mm*1.7mm

■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
DBL101S ~ DBL107S	B1	Approximate 0.32	50	5000	20000	TUBE
DBL101S ~ DBL107S	F1	Approximate 0.32	1500	3000	21000	REEL


■ Characteristics (Typical)

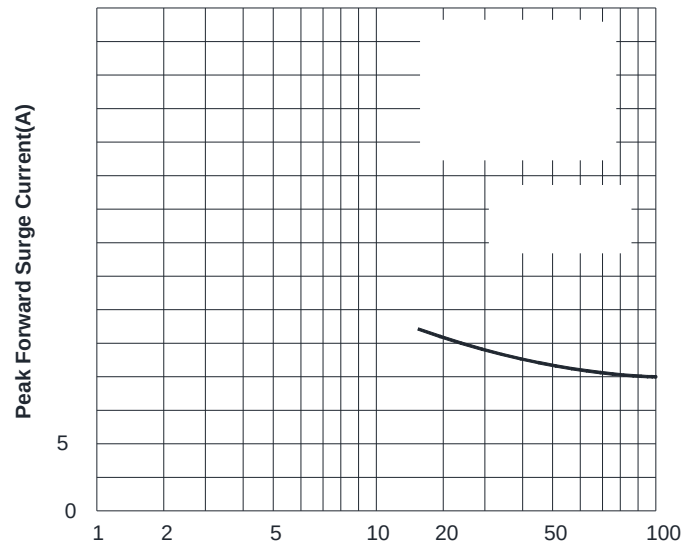



DBL101S THRU DBL107S

■ Outline Dimensions

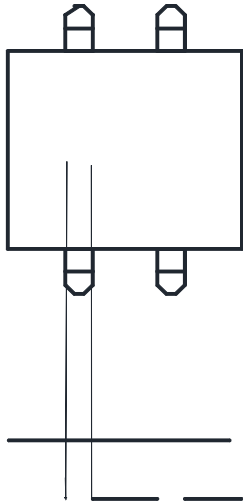

Dimensions in millimeters

DBLS		
Dim	Min	Max
A	6.20	6.50
B	9.60	10.30
C	5.00	5.20
D	8.13	8.51
E	2.35	2.45
F	1.02	1.2
G	0.22	0.33
H	1.02	1.53
I	0	0.30
J	1.80	2.10

■ Suggested pad layout

Dim	Min
P1	8.73
P2	5.12
Q1	2.22
Q2	1.2



DBL101S THRU DBL107S

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with