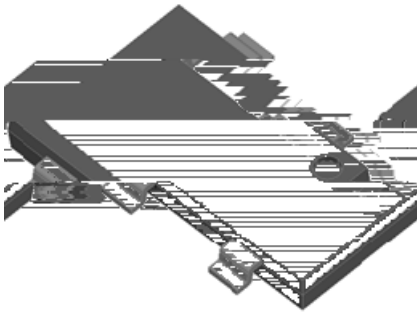


- UL recognition, file #E313149
- Glass passivated chip junction
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

- : YBS3
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen-free
- : Tin plated leads, solderable per J-STD-002 and JESD22-B102
- As marked on body

($T_a=25$ Unless otherwise specified)

Device marking code			YBSM40005	YBSM4001	YBSM4002	YBSM4004	YBSM4006	YBSM4008	YBSM4010
Maximum Repetitive Peak Reverse Voltage	VRRM	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	VRMS	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage	VDC	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load, $T_c=100$	IO	A	4.0						
Forward Surge Current * I_{FSM}									

V_F forward voltage drop per diode $I_{FM}=2.0A$

Maximum DC reverse current at rated DC blocking voltage per diode	IR	μA	$T_j=25$	5
			$T_j=125$	100
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	37



■



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, functionality, design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability. The malfunction of the product could directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and safety other sensitive devices). Yangjie or any of its branches, assumes no responsibility for any damages resulting from such improper use of sale.

This publication contains all information. Please refer to the latest version of the product specification on the website <http://www.21yangjie.com>, or consult our nearest Yangjie's sales office for assistance.