




PNP General Purpose Amplifier



Features

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for automatic insertion

Application

- Signal amplification
- Switching circuit
- High voltage

Mechanical data 9 J -STD-002 and J ESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Emitter-base voltage	V_{EB0}	V	$I_E = -100\text{ mA}$	-6
Collector current	I_C	A		-0.15
Power dissipation	P_D	mW		300
Junction temperature	T_J			-55 to +150
Storage temperature	T_{STG}			-55 to +150




PBHV9050T

RoHS
COMPLIANT

Item



Fig 7 P_D -Ta Curve

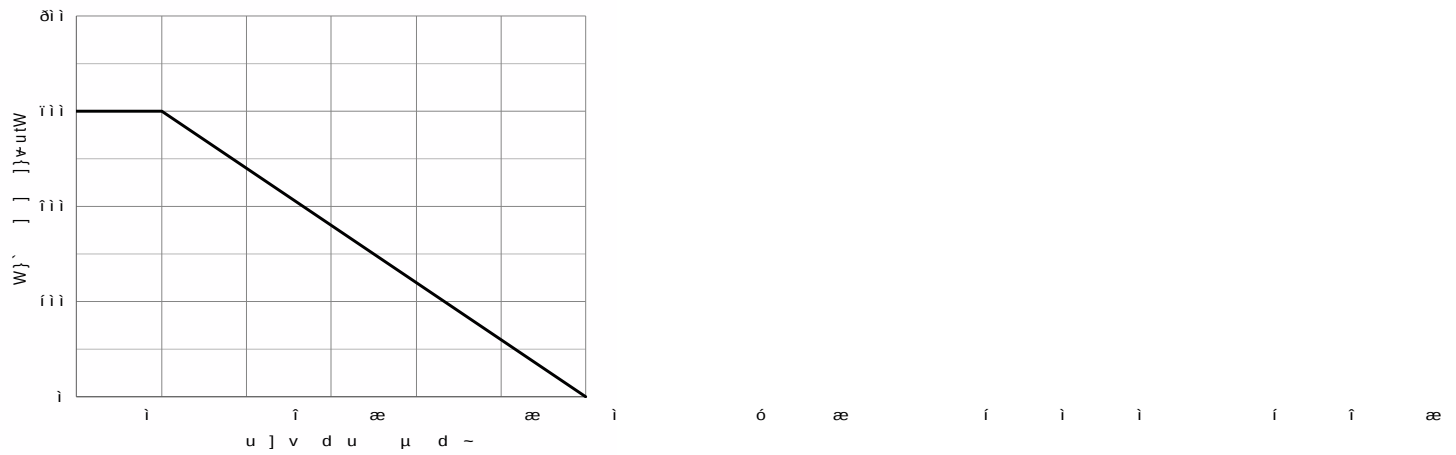



PBHV9050T

RoHS
COMPLIANT

■ Ordering Information

Prefered P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
PBHV9050T	F2	Approximate 0.008	3000	30000	120000	7" reel
PBHV9050T	F4	Approximate 0.008	10000	/	210000	13" reel

■ Outline Dimensions




TOP VIEW

SIDE VIEW

SIDE VIEW

■ Suggested Pad Layout





Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.